KUBIK SF

LED surfaced type

circular LED lighting fixture

Aluminum extruded body
Anodized coating
UV protected frosted diffuser
Adjustable length steel ropes
Nickel plated brass parts
Constant current LED driver
Electrostatic powder coating paint
Production in different lengths
Optional body colors
ENEC Standarts

LED | 230V | IP20 INT | CRI >80 | F | 60.000h L80 | McAdam C3 | CE | TSE

PRODUCT CODE	W	Lenght	Temp	Lumen*
KUBIKSF.50.640x640.N.4.120	50	640x640	4000K	6100
KUBIKSF.75.921x921.N.4.120	75	921x921	4000K	9000
KUBIKSF.100.1201x1201.N.4.120	100	1201x1201	4000K	12000
KUBIKSF.125.1482x1482.N.4.120	125	1482x1482	4000K	15000
KUBIKSF.160.1763x1763.N.4.120	160	1763x1763	4000K	19200
KUBIKSF.200.2325x2325.N.4.120	200	2325x2325	4000K	24000
KUBIKSF.65.640x921.N.4.120	65	640x921	4000K	7800
KUBIKSF.75.640x1201.N.4.120	75	640x1201	4000K	9120
KUBIKSF.88.921x1201.N.4.120	88	921x1201	4000K	10650
KUBIKSF.100.921x1482.N.4.120	100	921x1482	4000K	12285

** According to 4000K light temperature*

BASIC OPTIONS

- on/off — on/off Control (No Dimmable) Input
- 230V AC — Voltage 220-240V/AC - 50/60 Hz 5
- CRI >80 — Color Rendering Index >80
- 4K — Light Temperature 4000K
- Light Beam 120º
- White Satin Polycarbone Diffuser
- B — Black Body Color
- °C — -20C°/+40C° Temperature

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Transparent Diffuser	White Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI >90		W	E

PRODUCT CODING

Product Name	Product Power	Product Size	Control System					Color Temperature			Light Beam
XX	XX	XX	on/off	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K	
XX	XX	XX	N	V	P	T	D	3	4	6	XX



** For different options, please contact our team.*
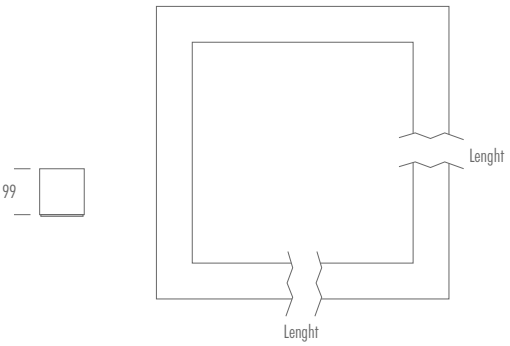
TECHNICAL DRAWINGS