ATOM *family*
Ø94-Ø232
recessed type
downlight

Aluminum injection body,
UV protected diffuser,
Opal Polystyren/PMMA (Fire-Proof) /
Microprismatic (3D) Diffuser Types,
Constant current LED driver,
Electrostatic powder coating paint,
Optional body colors,
ENEC Standards

LED | 230V | IP20 IP44 | CRI >80 | 60.000h L80 | McAdam C3

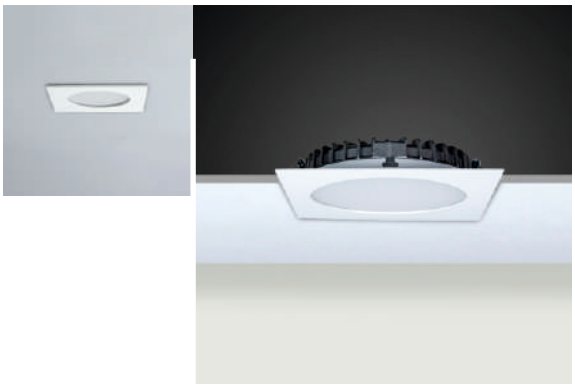

PRODUCT CODE	W	Height	Lenght	Hole Size	Temp	Lumen*
ATOM 2".6.94.N.4.110	6	45	Ø94	Ø85	4000K	570
ATOM 3".8.117.N.4.110	8	45	Ø117	Ø105	4000K	760
ATOM 4".10.147.N.4.110	10	45	Ø147	Ø130	4000K	1050
ATOM 5".16.174.N.4.110	16	45	Ø174	Ø158	4000K	1840
ATOM 6".21.196.N.4.110	21	45	Ø196	Ø175	4000K	2415
ATOM 8".23.232.N.4.110	23	45	Ø232	Ø214	4000K	2703

** According to 4000K light temperature*

BASIC OPTIONS

- on/off — on/off Control (No Dimmable)
- 230V AC — Input Voltage 230V/AC
- CRI >80 — Color Rendering Index >80
- 4K — Light Temperature 4000K
- Light Beam 110°
- White Polystyren Diffuser
- W — White Body Color

PRODUCT CODING

Product Name	Product Power	Product Size		Control System				Color Temperature			Light Beam
XX	XX	XX	N	V	P	T	D	3	4	6	XX
			on/off	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K	

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index >90	Transparent Diffuser	Diffuser Options	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI >90		D	E

TECHNICAL DRAWINGS

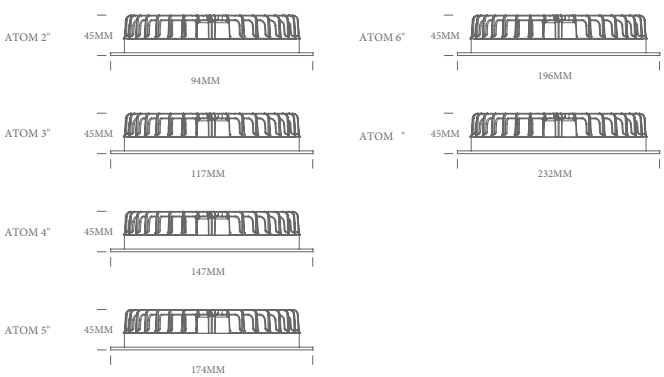



** For different options, please contact our team.*