

ELECTI ROUND 110

recessed type

downlight



Aluminum injection body
High efficiency reflector
Constant current LED driver
Electrostatic powder coating paint
Optional body colors
ENEC Standards
Made in TURKEY



PRODUCT CODE	W	Height	Length	Hole Size	Temp	Lumen*
ELECRO110.20.110.N.4.19	20	110	Ø110	Ø100	4000K	2300
ELECRO110.20.110.N.4.40	20	110	Ø110	Ø100	4000K	2200
ELECRO110.30.110.N.4.19	30	110	Ø110	Ø100	4000K	3600
ELECRO110.30.110.N.4.40	30	110	Ø110	Ø100	4000K	3500

* According to 4000K light temperature

REFLECTOR OPTIONS



PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX XX XX	XX XX XX	XX XX XX	XX XX XX	XX XX XX	XX XX XX
XX XX XX	XX XX XX	XX XX XX	XX XX XX	XX XX XX	XX XX XX



BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 230V/AC
CRI >80	Color Rendering Index >80
4K	Light Temperature 4000K
19°, 40°	Light Beam 19°, 40°
W	White Body Color

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index >90	Black Body Color	EMERGENCY K1Y
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI >90	B	E

TECHNICAL DRAWINGS

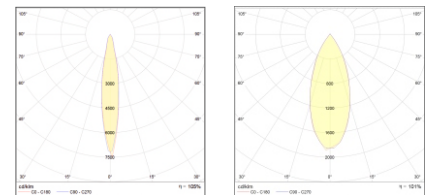

* For different options, please contact our team.