



Aluminum injection body
High efficiency reflector
Constant current LED driver
Electrostatic powder coating paint
Optional body colors
ENEC Standards



BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 230V/AC
CRI > 80	Color Rendering Index > 80
4K	Light Temperature 4000K
Light Beam 24°, 40°, 74°	
W	White Body Color

PRODUCT CODE	W	Height	Lenght	Hole Size	Temp	Lumen*
ALCOR.7.0159.N.4.24	20	105	Ø147	Ø130	4000K	2300
ALCOR.7.0159.N.4.40	20	105	Ø147	Ø130	4000K	2280
ALCOR.7.0159.N.4.74	20	105	Ø147	Ø130	4000K	2260
ALCOR.10.0159.N.4.24	30	105	Ø147	Ø130	4000K	3600
ALCOR.10.0159.N.4.40	30	105	Ø147	Ø130	4000K	3580
ALCOR.10.0159.N.4.74	30	105	Ø147	Ø130	4000K	3560


* According to 4000K light temperature

CUSTOMIZE OPTIONS


Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Black Body Color	Emergency KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI > 90	B	G

PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX XX XX	XX XX XX	XX XX XX	PUSH TRIAC DALI	3K 4K 6.5K	XX
XX XX XX	N	V	P T D	3 4 6	XX

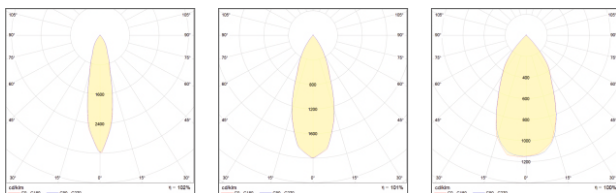

TECHNICAL DRAWINGS



* For different options, please contact our team.