

CIRRUS

LED pendant type

triangle LED lighting fixture

- Aluminum extruded body
- Anodized coating
- UV protected frosted diffuser
- Adjustable length steel ropes
- Nickel plated brass parts
- Constant current LED driver
- Electrostatic powder coating paint
- Production in different lengths
- Optional body colors
- ENEC Standards



PRODUCT CODE	W	Lenght	Temp	Lumen*
CIRRUS.34.445.N.4.120	34	445	4000K	3630

* According to 4000K light temperature

BASIC OPTIONS

- on/off Control (No Dimmable) Input
- 230V AC Voltage 220-240V/AC - 50/60 Hz 5
- CRI >80 Color Rendering Index >80
- 4K Light Temperature 4000K
- Light Beam 120°
- White Satin Polycarbonate Diffuser
- B Black Body Color
- °C -20C°/+40C° Temperature



PRODUCT CODING

Product Name	Product Power	Product Size	Control System				Color Temperature			Light Beam	
XX	XX	XX	on/off	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K	XX

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Transparent Diffuser	Differemt Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI >90	W	E	

TECHNICAL DRAWINGS

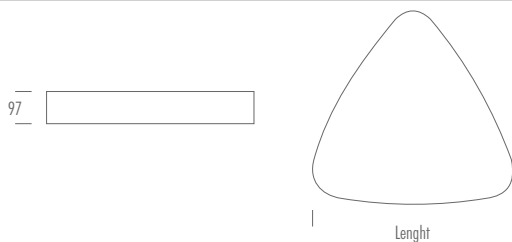

* For different options, please contact our team.