


COSMO DUO

recessed type
downlight



- Aluminum injection body
- Tempered glass
- Constant current LED driver
- Electrostatic powder coating paint
- Optional body colors
- ENEC Standards



BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 230V/AC
CRI > 80	Color Rendering Index > 80
4K	Light Temperature 4000K
	Light Beam 23°, 37°, 51°
w	White Body Color

PRODUCT CODE	W	Height	Length	Hole Size	Temp	Lumen*
CSMO2.14.117x234.N.4.23	14	65	117x234	105+105	4000K	1540
CSMO2.14.117x234.N.4.37	14	65	117x234	105+105	4000K	1520
CSMO2.14.117x234.N.4.51	14	65	117x234	105+105	4000K	1500
CSMO2.20.117x234.N.4.23	20	65	117x234	105+105	4000K	2140
CSMO2.20.117x234.N.4.37	20	65	117x234	105+105	4000K	2120
CSMO2.20.117x234.N.4.51	20	65	117x234	105+105	4000K	2100
CSMO2.26.117x234.N.4.23	26	65	117x234	105+105	4000K	2522
CSMO2.26.117x234.N.4.37	26	65	117x234	105+105	4000K	2500
CSMO2.26.117x234.N.4.51	26	65	117x234	105+105	4000K	2480


*According to 4000K light temperature

CUSTOMIZE OPTIONS


Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Black Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI > 90	B	G

PRODUCT CODING

Product Name	Product Power	Product Size	Control System					Color Temperature			Light Beam
XX	XX	XX	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K		
XX	XX	XX	N	V	P	T	D	3	4	6	XX

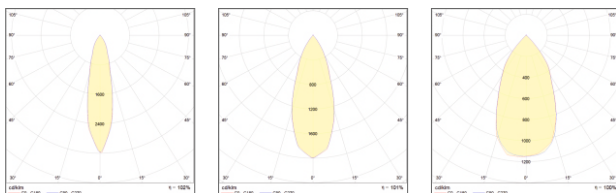

TECHNICAL DRAWINGS



* For different options, please contact our team.