



GALASSIA P80

LED pendant type

triangle LED lighting fixture

- Aluminum extruded body
- Anodized coating
- UV protected frosted diffuser
- Adjustable length steel ropes
- Nickel plated brass parts
- Constant current LED driver
- Electrostatic powder coating paint
- Production in different lengths
- Optional body colors
- ENEC Standarts




BASIC OPTIONS

on/off	on/off Control (No Dimmable) Input
230V AC	Voltage 220-240V/AC - 50/60 Hz 5
CRI >80	Color Rendering Index >80
4K	Light Temperature 4000K
	Light Beam 120°
	White Satin Polycarbonate Diffuser
B	Black Body Color
°C	-20°C/+40°C Temperature

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Transparent Diffuser	White Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI >90		W	E




PRODUCT CODE	W	Length	Temp	Lumen*
GALASSIA P80.30.400.N.4.120	30	400	4000K	2420
GALASSIA P80.45.600.N.4.120	45	600	4000K	3690
GALASSIA P80.60.800.N.4.120	60	800	4000K	4920
GALASSIA P80.75.1000.N.4.120	75	1000	4000K	6150
GALASSIA P80.90.1200.N.4.120	90	1200	4000K	7380

* According to 4000K light temperature

PRODUCT CODING

Product Name	Product Power	Product Size	Control System					Color Temperature			Light Beam
XX	XX	XX	on/off	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K	
XX	XX	XX	N	V	P	T	D	3	4	6	XX

TECHNICAL DRAWINGS

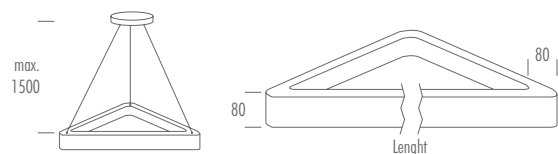

* For different options, please contact our team.