

AURA L 90

LED pendant type

square LED lighting fixture



Aluminum extruded body
Anodized coating
UV protected frosted diffuser
Adjustable length steel ropes
Nickel plated brass parts
Constant current LED driver
Electrostatic powder coating paint
Production in different lengths
Optional body colors
ENEC Standards



PRODUCT CODE	W	Lenght	Temp	Lumen*
AURAL90.65.1000x1000.N.4.120	65	1000x1000	4000K	6220
AURAL90.80.1000x1000.N.4.120	65	1000x1000	4000K	8000

* According to 4000K light temperature

BASIC OPTIONS

on/off	on/off Control (No Dimmable) Input
230V AC	Voltage 220-240V/AC - 50/60 Hz 5
CRI >80	Color Rendering Index >80
4K	Light Temperature 4000K
▲	Light Beam 120°
●	White Satin Polycarbonate Diffuser
B	Black Body Color
°C	-20C°/+40C° Temperature



PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX XX XX	XX XX XX	N V P T D	3 4 6	XX	XX

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Transparent Diffuser	Different Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI > 90	○	W	E

TECHNICAL DRAWINGS

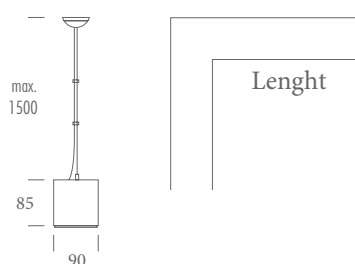

* For different options, please contact our team.