

LOOP - IN

LED pendant type

Circular LED lighting fixture



Aluminum extruded body
Anodized coating
UV protected frosted diffuser
Adjustable length steel ropes
Nickel plated brass parts
Constant current LED driver
Electrostatic powder coating paint
Production in different lengths
Optional body colors
ENEC Standards
IP40



LED	230V	IP40 INT	CRI >80			60.000h L80	McAdam C3	CE	
-----	------	-------------	------------	--	--	----------------	--------------	----	--

PRODUCT CODE	W	Lenght	Temp	Lumen*
LOOPIN.38/17.620.N.4.120	38 / 17	620	4000K	4180 / 1870
LOOPIN.50/20.800.N.4.120	50 / 20	800	4000K	5500 / 2160
LOOPIN.60/27.980.N.4.120	60 / 27	980	4000K	6600 / 2880
LOOPIN.76/33.1155.N.4.120	76 / 33	1155	4000K	8360 / 3600
LOOPIN.88/36.1335.N.4.120	88 / 36	1335	4000K	9680 / 3960
LOOPIN.100/43.1500.N.4.120	100 / 43	1500	4000K	12000 / 4680
LOOPIN.126/53.1890.N.4.120	126 / 53	1890	4000K	13620 / 5760

* According to 4000K light temperature

BASIC OPTIONS

on/off	on/off Control (No Dimmable) Input
230V AC	Voltage 220-240V/AC - 50/60 Hz
CRI >80	Color Rendering Index >80
4K	Light Temperature 4000K
	Light Beam 120°
	White Satin Polycarbonate Diffuser
B	Black Body Color
°C	-20°C/+45°C Temperature


*With Ceiling Mounted Electrical Junction Box

*With 1M Adjustable Steel Ropes

PRODUCT CODING


Product Name	Product Power	Product Size	Control System					Color Temperature			Light Beam
XX XX XX	XX XX XX	XX	on/off	1-10V	PUSH	TRIAC	DAU	3K	4K	6.5K	
XX XX XX	XX XX XX	XX	N	V	P	T	D	3	4	6	XX

TECHNICAL DRAWINGS

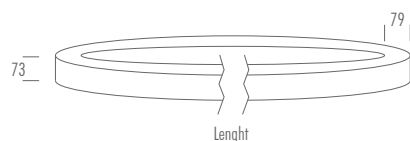

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Transparent Diffuser	Different Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI > 90		W	E



* For different options, please contact our team.