


# AURA CELL

LED recessed type

backlight panel lighting fixture



- DKP sheet metal body
- UV protected diffuser
- Anti-glare optical lens
- Constant current LED driver
- Electrostatic powder coating paint
- Optional body colors
- ENEC Standarts

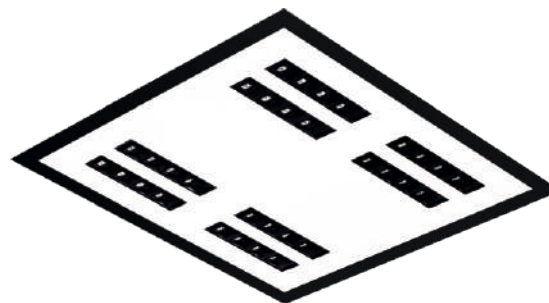

PRODUCT CODE	W	Lenght	Temp	Lumen*
AURACELL.40.600x600.N.4.50	40	600x600	4000K	4260
AURACELL.40.600x600.N.4.80	40	600x600	4000K	4180

\* According to 4000K light temperature

## BASIC OPTIONS

- on/off Control (No Dimmable) Input
- Voltage 220-240V/AC - 50/60 Hz 5
- Color Rendering Index >80
- Light Temperature 4000K
- Light Beam 120°
- White Satin Polycarbonate Diffuser
- Black Body Color
- 20C°/+40C° Temperature


## PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX	XX	XX	on/off 1-10V PUSH TRIAC DALI	3K 4K 6.5K	XX

## CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Transparent Diffuser	Differemt Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI > 90	○	W	E

## TECHNICAL DRAWINGS



\* For different options, please contact our team.