


AURA LINE 33

24V DC

pendant & surface type
linear lighting fixture

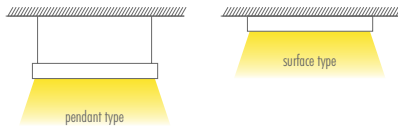

Aluminum extruded body
UV Protected Diffuser
Adjustable length steel ropes
Nickel plated brass parts
24V DC
Electrostatic powder coating paint
Production in different lengths
Optional body colors
ENEC standards

BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 24V
CRI >80	Color Rendering Index >80
4K	Light Temperature 4000K
Light Beam 120°	Light Beam 120°
Operating Temperature : -20 / 40 °C	Operating Temperature : -20 / 40 °C
G	Grey Body Color

PRODUCT CODE	W	Length	Temp	Lumen*
AURA LINE 33.18.600.N.4.120	18	600	4000K	1760
AURA LINE 33.30.1000.N.4.120	30	1000	4000K	2940
AURA LINE 33.36.1200.N.4.120	36	1200	4000K	3530
AURA LINE 33.45.1500.N.4.120	54	1500	4000K	5290


* According to 4000K light temperature

CUSTOMIZE OPTIONS


Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Optional Body Color	Emergency KIT	Pendant or Surface Type
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI >90	B	E	M

PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX	XX	XX	on/off	3K	XX
XX	XX	XX	1-10V	4K	XX
XX	XX	XX	PUSH	6.5K	XX
XX	XX	XX	TRIAC	XX	XX
XX	XX	XX	DALI	XX	XX



TECHNICAL DRAWINGS

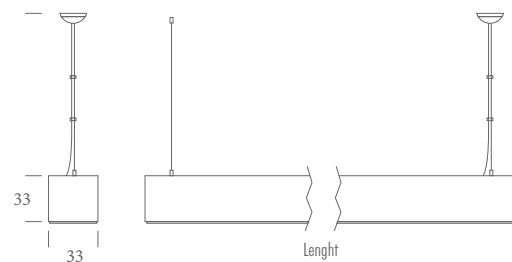

* For different options, please contact our team.