

LINEA 108

recessed type
linear lighting fixture



Aluminum extruded body
UV protected diffuser
Nickel plated brass parts
Constant current LED driver
Electrostatic powder coating paint
Production in different lengths
Optional body colors
ENEC standards



BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 220-240V/AC, 50-60HZ
CRI > 80	Color Rendering Index > 80
4K	Light Temperature 4000K
120°	Light Beam 120°
Operating Temperature	Operating Temperature : -20 / 40 °C
G	Grey Body Color

PRODUCT CODE	W	Lenght	Temp	Lumen*
LINEA 108.18.600.N.4.120	18	600	4000K	1728
LINEA 108.30.1000.N.4.120	30	1000	4000K	2880
LINEA 108.36.1200.N.4.120	36	1200	4000K	3460
LINEA 108.54.1500.N.4.120	54	1500	4000K	5180

* According to 4000K light temperature



CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Optional Body Color	Emergency KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI > 90	B	E

PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX	XX	XX	on/off	3K	XX
XX	XX	XX	1-10V	4K	XX
XX	XX	XX	PUSH	6.5K	XX
XX	XX	XX	TRIAC	XX	XX
XX	XX	XX	DALI	XX	XX

TECHNICAL DRAWINGS

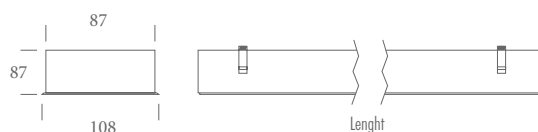

* For different options, please contact our team.