


ARIS

LED surface type
Ceiling Mounted lighting fixture



Flawless Wall mounted luminaire that reflects numerous benefits in terms of installation, maintenance and operation with IP20. ARIS is a prime example of the immense power of puristic design. Without unnecessary frills; nothing distracts from the focus on the key essentials: powerful, homogeneous light in a perfectly flawless cylindrical form.

The housing and technical components have been carefully selected to ensure economic efficiency and a long service life for all products in the range.

Characteristics

Aluminium Injection Body

Electrostatic Powder Paint

Optional RAL Colors

Aluminium PCB

LED with Life Span > 100.000 Hours

CCT tolerance within a 3 step MacAdams ellipse

Corrosion Protection (Optional)

5 Years Warranty

Marine Coating (Optional)

Key Advantages

- Flawless form
- Economic and efficient
- Easy installation
- High performance LED
- High corrosion resistance

Applications



Exterior




Facade



Architectural



Ancient

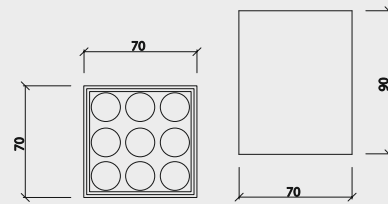

Standard Product

Input	220-240V / AC 50-60Hz
Control	On / Off
Optic	30°
Light Color	4000K
Body Color	9016 White
CRI	>82
Protection	IP20
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,090
Weight	0,80kg
Ambient Temperature	-30°C / +60°C


Available Options

Input	24V / DC
Control	DALI, DIM, DMX
Optic	30°, 60°, 90°
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Warranty	7-10 Years


REFLECTOR OPTIONS




Light Colors



Body Colors Options

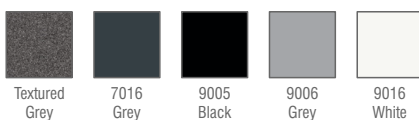

Beam Angle Options

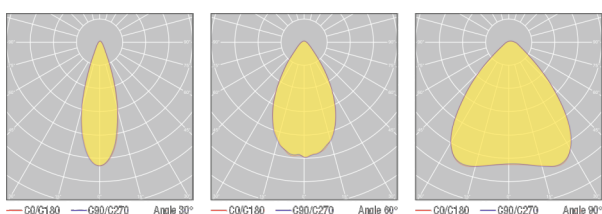

Ordering Details

Product Code	Power	Light Color	Lumen
ARIS.8.AC.N.4.30.9016	8W	4000K	745
ARIS.12.AC.N.4.30.9016	12W	4000K	1118

* For different options, please contact our team.

Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX XX	XX	AC DC	0-10V PUSH TRAC DALI	3K 4K 6.5K	XX	XX
XX XX	XX	AC DC	N V P T D	3 4 6	XX	XX