
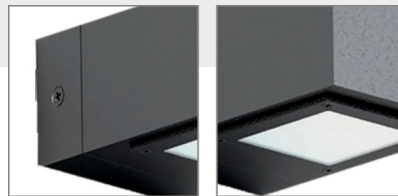


BOLT

Surface Wall Lamp
Wall Mounted Lighting, IP65



The elegant sobriety of the BOLT, combined with state-of-the-art lighting technology, ensures its over-average versatility. It can easily be integrated in just about any architectural environment and fulfils every requirement – lighting paths in compliance with safety standards, used in a row as a light signet, as design-oriented decorative lighting or as a standard guidance system.

Various light distributions, lumen packages, sizes and configurations make these highly adaptable LED outdoor luminaires even more flexible. Depending on personal taste and the area of installation. It produces a symbolic, almost archetypal effect without losing its characteristically modern simplicity.

Characteristics

- Aluminium Body
- Electrostatic Powder Paint
- Optional RAL Colors
- Extra Clear 5mm Tempered or Diffuser Glass
- Aluminium PCB
- LED with Life Span > 100.000 Hours
- CCT tolerance within a 3 step MacAdams ellipse
- Corrosion Protection (Optional)
- 5 Years Warranty
- Marine Coating (Optional)




Key Advantages

- Can be easily integrated to many designs
- Economic and efficient
- Easy installation
- High performance LED
- High corrosion resistance
- UV Resistant Diffuser

Applications



BOLT

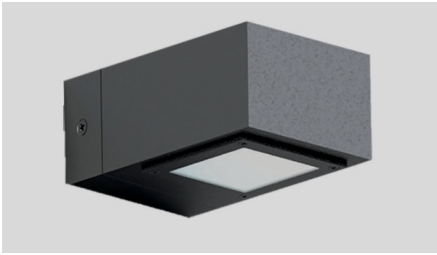


Standard Product

Input	220-240V / AC 50-60Hz
Control	On / Off
Optic	Symmetrical
Light Color	4000K
Body Color	7016 Grey
CRI	>82
Protection	IP65
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,090
Weight	2,7 kg
Ambient Temperature	-30°C / +60°C


Available Options

Input	24V / DC
Control	DALI, DIM, DMX
Optic	60°, 90°, Asymmetrical
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP66 - IP67
Warranty	7-10 Years

Light Colors



Body Colors Options




Ordering Details

Product Code	Power	Light Color	Lumen
BOLT.15.AC.N.4.Sym.7016	15W	4000K	1900

* For different options, please contact our team.

Beam Angle Options

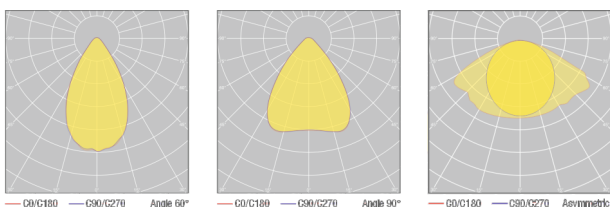

Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX	XX	AC DC on/off 1-10V	PUSH TRAC DALI	3K 4K 6.5K	XX	XX
XX	XX	AC DC N V	P T D	3 4 6	XX	XX