

# CANDLE

LED surface type  
Ceiling/Wall mounted lighting fixture



**The CANDLE's soft light creates strikingly beautiful light patterns and reveals stylistic finesse, which bewitches both owner and spectator. Thanks to CANDLE, areas can tell stories.**

This almost magic effect is due to a very pragmatic approach, namely that extraordinary performance creates extraordinary effects. Its Contemporary design is perfect for enhancing residential and urban areas featuring a modern,

Contemporary design. It creates a direct light beam, thanks to its monodirectional optics, able to enhance a precise area or subject, without glare.

CANDLE have options with power LED and LED Bulbs. Opal and Opaque diffuser is giving elegant design options.

## Characteristics

Aluminium Injection Body

Electrostatic Powder Paint

Optional RAL Colors

UV Resistant PMMA Diffuser

Aluminium PCB

LED with Life Span > 100.000 Hours

CCT tolerance within a 3 step MacAdams ellipse

Corrosion Protection

5 Years Warranty

Marine Coating (Optional)

## Key Advantages

- Modern decorative design
- Can be easily integrated to many designs
- Economic and tneicfife
- Easy installation
- High performance LED
- High corrosion resistance
- High lumen output
- Adjustable cable

## Applications



Exterior



Facade




Architectural



Ancient

# CANDLE

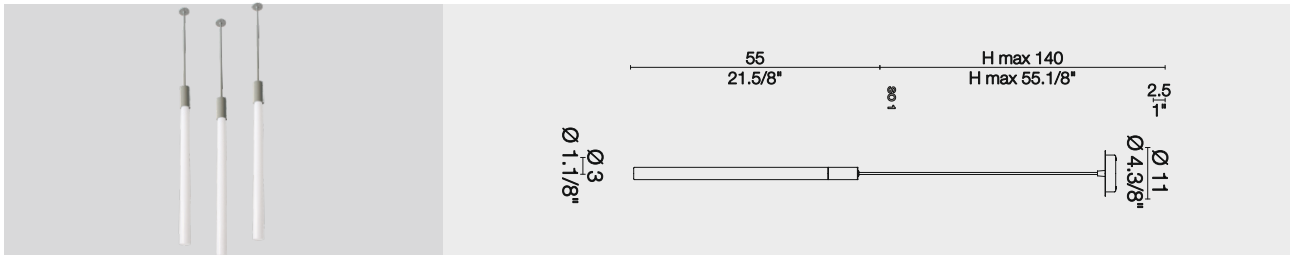


## Standard Product

Input	220-240V / AC 50-60Hz
Control	On / Off
Optic	120°
Light Color	4000K
Body Color	9016 White
CRI	>82
Protection	IP40
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,090
Weight	1.20 kg
Ambient Temperature	-30°C / +60°C

## Available Options

Input	24V / DC
Control	DALI, DIM, DMX
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP66 - IP67
Warranty	7-10 Years
Glass	Extra Clear
Diffuser	Transparent & Opal & Opac

## Light Colors




## Ordering Details


Product Code	Power	Light Color	Lumen
CANDLE.3.AC.N.4.120.9016	3W	4000K	390
CANDLE.6.AC.N.4.120.9016	6W	4000K	780
CANDLE.9.AC.N.4.120.9016	9W	4000K	1170
CANDLE.E27.20.N.4.120.9016	20W	4000K	1300

\* For different options, please contact our team.

## Body Colors Options



## Beam Angle Options

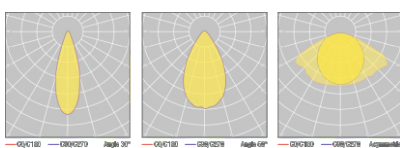

## Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX	XX	AC DC on/off 1-10V	PUSH TRAC DALI	3K 4K 6.5K	XX	XX
XX	XX	AC DC N V P T D			XX	XX