

# LAQUE M

LED surface type  
Ceiling Mounted lighting fixture



**Flawless Wall mounted luminaire that reflects numerous benefits in terms of installation, maintenance and operation with IP65. LAQUE M is a prime example of the immense power of puristic design. Without unnecessary frills; nothing distracts from the focus on the key essentials: powerful, homogeneous light in a perfectly flawless cylindrical form.**

The housing and technical components have been carefully selected to ensure economic efficiency and a long service life for all products in the range.

## Characteristics

- Aluminium Injection Body
- Electrostatic Powder Paint
- Optional RAL Colors
- Extra Clear 5mm Tempered Glass
- Aluminium PCB
- LED with Life Span > 100.000 Hours
- CCT tolerance within a 3 step MacAdams ellipse
- Corrosion Protection (Optional)
- 5 Years Warranty
- Marine Coating (Optional)
- COB LED & Power LED Options

## Key Advantages

- Flawless form
- Economic and efficient
- Easy installation
- High performance LED
- High corrosion resistance

## Applications



Exterior



Facade




Architectural



Ancient

# LAQUE M

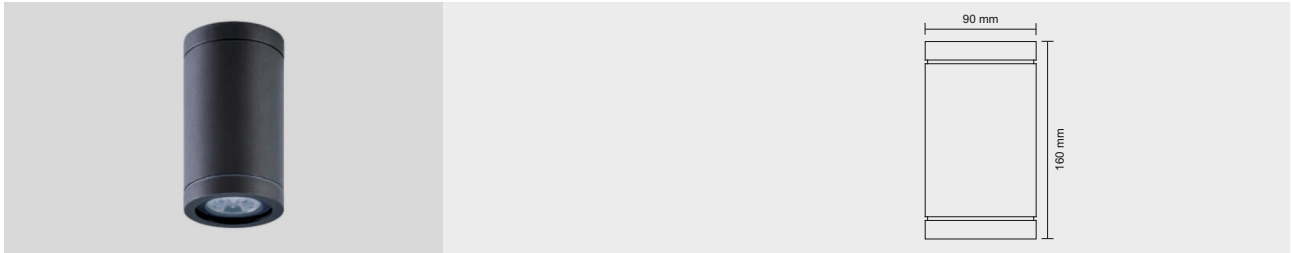


## Standard Product

Input	220-240V / AC 50-60Hz
Control	On / Off
Optic	30°
Light Color	4000K
Body Color	7016 Grey
CRI	>82
Protection	IP65
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,090
Weight	1.20kg
Ambient Temperature	-30°C / +60°C

## Available Options

Input	24V / DC
Control	DALI, DIM, DMX
Optic	8°, 15°, 30°, 40°, 60°, 90°
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP66 - IP67
Warranty	7-10 Years

## Light Colors




## Ordering Details

Product Code	Power	Light Color	Lumen
LAQUE.M.6.AC.N.4.30.7016	6W	4000K	720
LAQUE.M.9.AC.N.4.30.7016	9W	4000K	1080
LAQUE.M.12.AC.N.4.30.7016	12W	4000K	1440

\* For different options, please contact our team.

\* Dimensions can be customized.

## Body Colors Options

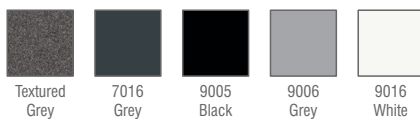

## Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX   XX	AC   DC	OFF   1.30V	PUSH   TRAC   BAU	3K   4K   6.5K	XX	XX
XX XX	AC DC	N V	P T D	3 4 6	XX	XX

## Beam Angle Options

