

# LINEA 82

recessed type

linear lighting fixture

Aluminum extruded body

UV protected diffuser

Nickel plated brass parts

Constant current LED driver

Electrostatic powder coating paint


Production in different lengths

Optional body colors

ENEC standards



PRODUCT CODE	W	Lenght	Temp	Lumen*
LINEA 82.11.500.N.4.120	11	500	4000K	1133
LINEA 82.16.500.N.4.120	16	500	4000K	1648
*LINEA 82.15.600.N.4.120	15	600	4000K	1725
LINEA 82.18.600.N.4.120	18	600	4000K	1854
*LINEA 82.20.800.N.4.120	20	800	4000K	2300
LINEA 82.22.1000.N.4.120	22	1000	4000K	2266
LINEA 82.25.1000.N.4.120	25	1000	4000K	2575
LINEA 82.32.1000.N.4.120	32	1000	4000K	3296
LINEA 82.32.1100.N.4.120	30	1100	4000K	3450
LINEA 82.27.1200.N.4.120	27	1200	4000K	2781
LINEA 82.28.1200.N.4.120	28	1200	4000K	2884
LINEA 82.39.1200.N.4.120	39	1200	4000K	4017
LINEA 82.30.1300.N.4.120	30	1300	4000K	3090
LINEA 82.36.1400.N.4.120	36	1400	4000K	3708
LINEA 82.33.1500.N.4.120	33	1500	4000K	3399
LINEA 82.45.1500.N.4.120	45	1500	4000K	4635
LINEA 82.48.1500.N.4.120	48	1500	4000K	4944
*LINEA 82.45.1800.N.4.120	45	1800	4000K	5175
LINEA 82.48.1800.N.4.120	48	1800	4000K	4944
LINEA 82.44.2000.N.4.120	44	2000	4000K	4532
LINEA 82.54.2000.N.4.120	54	2000	4000K	5562
LINEA 82.64.2000.N.4.120	64	2000	4000K	6592
*LINEA 82.44.2500.N.4.120	44	2500	4000K	5060
LINEA 82.64.2500.N.4.120	64	2500	4000K	6510
LINEA 82.65.3000.N.4.120	65	3000	4000K	6695
LINEA 82.96.3000.N.4.120	96	3000	4000K	9888




## BASIC OPTIONS

- on/off Control (No Dimmable)
- Input Voltage 220-240V/AC, 50-60HZ
- Color Rendering Index > 80
- Light Temperature 4000K
- Light Beam 120°
- Operating Temperature : -20 / 40 °C
- Grey Body Color

## CUSTOMIZE OPTIONS


- Dimmable 1-10V
- Dimmable PUSH
- Dimmable TRIAC
- Dimmable DALI
- Input Voltage 24V/DC
- Light Temperature 3000K
- Light Temperature 6500K
- Dynamic White
- Color Rendering Index > 90
- Optional Body Color
- Emergency KIT



## PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX	XX	XX	on/off, 1-10V, PUSH, TRIAC, DALI	3K, 4K, 6.5K	XX
XX	XX	XX	N, V, P, T, D	3, 4, 6	XX

## TECHNICAL DRAWINGS

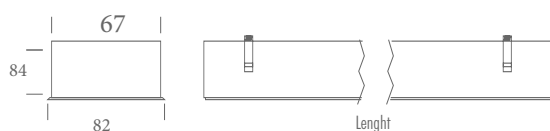

\* For different options, please contact our team.

