

LOOP RC

LED recessed type

Circular lighting fixture



- Aluminum extruded body
- Anodized coating
- UV protected frosted diffuser
- Adjustable length steel ropes
- Nickel plated brass parts
- Constant current LED driver
- Electrostatic powder coating paint
- Production in different lengths
- Optional body colors
- ENEC Standarts



PRODUCT CODE	W	Lenght	Temp	Lumen*
LOOPRC.50.820.N.4.120	50	820	4000K	5520
LOOPRC.63.1000.N.4.120	63	1000	4000K	6930
LOOPRC.75.1175.N.4.120	75	1175	4000K	8250
LOOPRC.88.1355.N.4.120	88	1355	4000K	9680
LOOPRC.100.1520.N.4.120	100	1520	4000K	15880
LOOPRC.126.1910.N.4.120	126	1910	4000K	13895
LOOPRC.151.2275.N.4.120	151	2275	4000K	17100

* According to 4000K light temperature

BASIC OPTIONS

- on/off on/off Control (No Dimmable) Input
- 230V AC Voltage 220-240V/AC - 50/60 Hz 5
- CRI >80 Color Rendering Index >80
- 4K Light Temperature 4000K
- Light Beam 120°
- White Satin Polycarbonate Diffuser
- B Black Body Color
- °C -20C°/+40C° Temperature



PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX	XX	XX	on/off 1-10V PUSH TRIAC DALI	3K 4K 6.5K	XX

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Transparent Diffuser	Differemt Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI >90	W	E	

TECHNICAL DRAWINGS

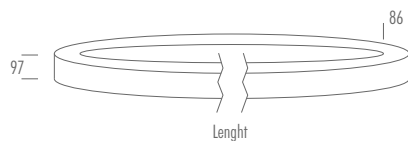

* For different options, please contact our team.