

MIRAL

Wall Luminaire
Surface/Wall Mounted



Wall light luminaire with a unique style that combines solid shape with sources of remarkable performance.

The proportions and the variety of dimensions make it an element with unlimited applications: reliable and easily inserted in any urban area. The LED light source is shielded and offers considerable visual comfort, lighting without glare and without generating light pollution. It is the ideal solution to complete the urban development. Suitable for adding a touch of elegance to your landscape areas.

Characteristics

Aluminium Injection Body

Electrostatic Powder Paint

Optional RAL Colors

Extra Clear 5mm Tempered Glass

Aluminium PCB

LED with Life Span > 100.000 Hours

CCT tolerance within a 3 step MacAdams ellipse

Corrosion Protection (Optional)

5 Years Warranty

Marine Coating (Optional)

Key Advantages

- High sealing
- Simple for modern designs
- Economic and efficient
- Easy installation
- High performance LED
- High corrosion resistance

Applications



Exterior



Facade




Architectural



Ancient

MIRAL

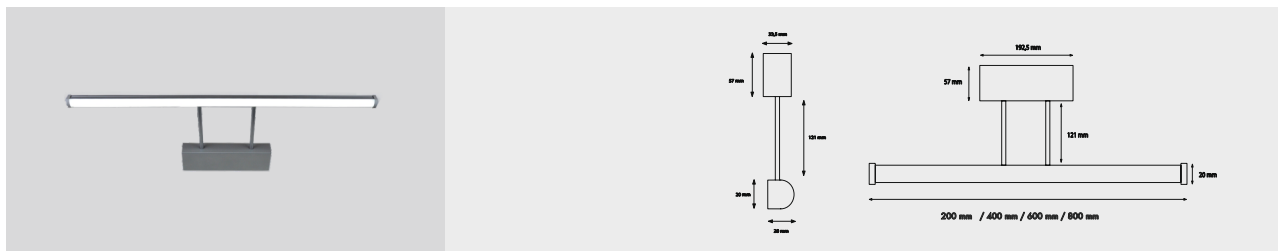


Standard Product

Input	220-240V / AC 50-60Hz
Control	On / Off
Optic	120°
Light Color	4000K
Body Color	7016 Grey
CRI	>82
Protection	IP44
Impact Resistance	IK08
Protection class IEC	Class I
Power factor (min.)	0,090
Weight	0,80 - 1.20 kg
Ambient Temperature	-30°C / +60°C

Available Options

Input	24V / DC
Control	DALI, DIM, DMX
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP65 - IP66 - IP67
Warranty	7-10 Years

Light Colors




Ordering Details Led


Product Code	Power	Light Color	Lumen
MIRAL.3.AC.N.4.120.7016	3W	4000K	240
MIRAL.6.AC.N.4.120.7016	6W	4000K	280
MIRAL.9.AC.N.4.120.7016	9W	4000K	720
MIRAL.12.AC.N.4.120.7016	12W	4000K	960

* For different options, please contact our team.

Body Colors Options

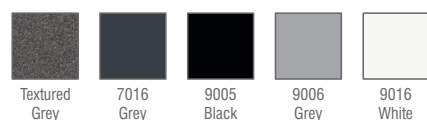

Beam Angle Options



Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX	XX	AC DC	ON/OFF 0-10V PUSH TRAC DALI	3K 4K 6.5K	XX	XX
XX	XX	AC DC	N V P T D	3 4 6	XX	XX