

# Q-DOT L ADJ

- recessed type  
downlight
- Aluminum injection body
- Adjustable Head
- High efficiency reflector
- Tempered Glass
- Constant current LED driver
- Electrostatic powder coating paint
- Optional body colors
- ENEC Standards



## BASIC OPTIONS

on/off	on/off Control (No Dimmable) Input
230V AC	Voltage 220-230V/AC - 50-60Hz
CRI >80	Color Rendering Index >80
4K	Light Temperature 4000K
	Light Beam 23°, 37°, 51°
w	White Body Color

PRODUCT CODE	W	Height	Length	Hole Size	Temp	Lumen*
QDOTLADJ.7.92.N.4.23	7	75	125x125	90	4000K	770
QDOTLADJ.7.92.N.4.37	7	75	125x125	90	4000K	750
QDOTLADJ.7.92.N.4.51	7	75	125x125	90	4000K	730
QDOTLADJ.10.92.N.4.23	10	75	125x125	90	4000K	1070
QDOTLADJ.10.92.N.4.37	10	75	125x125	90	4000K	1050
QDOTLADJ.10.92.N.4.51	10	75	125x125	90	4000K	1030


\* According to 4000K light temperature

## CUSTOMIZE OPTIONS


Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index >90	Black / Grey Body Color	Emergency kit
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI >90	B	E

## PRODUCT CODING

Product Name	Product Power	Product Size	Control System					Color Temperature			Light Beam
XX	XX	XX	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K		
XX	XX	XX	N	V	P	T	D	3	4	6	XX

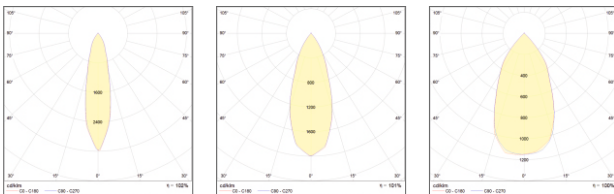

## TECHNICAL DRAWINGS



\* For different options, please contact our team.