

ARCHI DOT RGBW

Dot Lighting
Surface Mounted Facade Lighting



Archi dot luminarie is mainly used dot facade lighting. Continuous interconnection with cables.

Aluminium body offering various installation types. It is available as dimming options and many customizations options.



Basic Options

Light Source	Power LED
Light Source Color	RGBW
Control Interface	DMX
Protection Class IEC	Class 1
CE Mark	Yes
ENEC Standards	Yes
Warranty Period	5 years
L 70	> 60 000 Hours
MacAdams	3 Step MacAdams
Ambient Temperature	-25°C to +60°C

Electrical Options

Input Voltage	24V/DC
Power	6W
Light Color	RGBW
Power Unit	Power Supply (External)

Body Options

Housing	Aluminium
Glass	PMMA
Gasket	Silicone
Protection Rating	IP66
Impact Resistance	IK07
Color	Grey
Dimensions (ØxH)	Ø100x70mm
Screws	316 Stainless Steel

Optics

Light Distribution	Opal
--------------------	------

Connection

Connection Cable	4 pins circular
------------------	-----------------

Customized Options

Power	2W - 10W ± %5
Input Voltage	12V/DC (Optional)
Light Color	Monocolor / RGB / CCT
Control Interface	SPI

ARCHI DOT RGBW

Dot Lighting
Surface Mounted Facade Lighting


Ordering Details

Product Code	Input	Power	Light Color	Lenght	Control
Cesar Mini. 8.320.D.RGBW.XX	220V/AC	8W	RGBW	328mm	DMX
Cesar Mini. 12.320.D.RGBW.XX	220V/AC	12W	RGBW	328mm	DMX
Cesar Mini. 16.620.D.RGBW.XX	220V/AC	16W	RGBW	628mm	DMX

Product Coding

Product Name	Product Power	Product Size	Control System	Color	Light Beam
XX	XX	XX	DMX	RGB	XX
XX	XX	XX	D	RGBW	XX

Technical Drawing

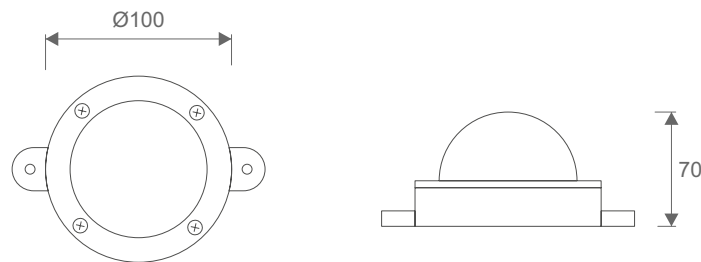

Connection Diagram

