




# PANEL C

## 600x600

LED recessed type  
backlight Clip-in panel lighting

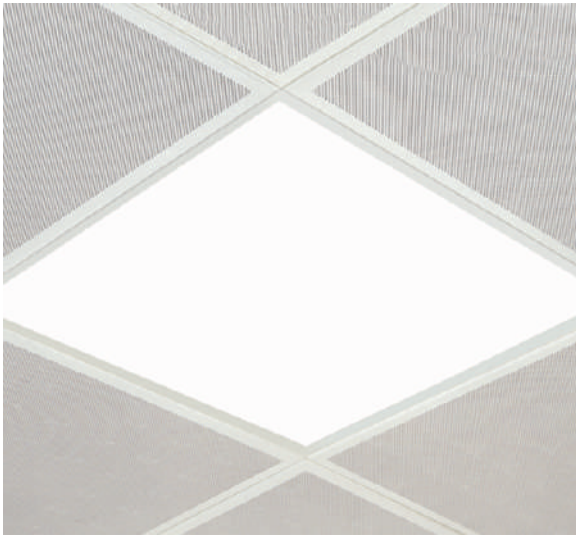

- DKP sheet metal body
- Electrostatic coated
- UV protected diffuser
- Constant current LED driver
- Electrostatic powder coating paint
- Optional body colors
- ENEC Standards

Made in TURKEY



### BASIC OPTIONS

|         |                                    |
|---------|------------------------------------|
| on/off  | on/off Control (No Dimmable) Input |
| 230V AC | Voltage 220-240V/AC - 50/60 Hz 5   |
| CRI >80 | Color Rendering Index >80          |
| 4K      | Light Temperature 4000K            |
| ▲       | Light Beam 120°                    |
| ●       | White Satin Polycarbonate Diffuser |
| °C      | -20°C/+40°C Temperature            |

| PRODUCT CODE | W | Lenght | Temp | Lumen* |
|--------------|---|--------|------|--------|
|--------------|---|--------|------|--------|

#### STANDARD LUMEN

|                           |    |         |       |      |
|---------------------------|----|---------|-------|------|
| PLC60.28P.575x575.N.4.120 | 28 | 600x600 | 4000K | 2800 |
| PLC60.36P.575x575.N.4.120 | 36 | 600x600 | 4000K | 3600 |
| PLC60.42P.575x575.N.4.120 | 42 | 600x600 | 4000K | 4200 |

\* According to 4000K light temperature


#### HIGH LUMEN

|                             |    |         |       |      |
|-----------------------------|----|---------|-------|------|
| PLC60HL.28P.575x575.N.4.120 | 28 | 600x600 | 4000K | 3350 |
| PLC60HL.36P.575x575.N.4.120 | 36 | 600x600 | 4000K | 4320 |
| PLC60HL.42P.575x575.N.4.120 | 42 | 600x600 | 4000K | 4800 |

\* According to 4000K light temperature

### CUSTOMIZE OPTIONS

|                |               |                |               |                      |                         |                         |               |                            |                      |                  |               |
|----------------|---------------|----------------|---------------|----------------------|-------------------------|-------------------------|---------------|----------------------------|----------------------|------------------|---------------|
| Dimmable 1-10V | Dimmable PUSH | Dimmable TRIAC | Dimmable DALI | Input Voltage 24V/DC | Light Temperature 3000K | Light Temperature 6500K | Dynamic White | Color Rendering Index > 90 | Transparent Diffuser | White Body Color | EMERGENCY KIT |
| 1-10V          | PUSH          | TRIAC          | DALI          | 24V DC               | 3K                      | 6.5K                    | DYN >90       | CRI >90                    | ○                    | W                | E             |



### PRODUCT CODING

| Product Name | Product Power | Product Size | Control System |       |      |       | Color Temperature |    |    | Light Beam |    |
|--------------|---------------|--------------|----------------|-------|------|-------|-------------------|----|----|------------|----|
| XX           | XX            | XX           | on/off         | 1-10V | PUSH | TRIAC | DALI              | 3K | 4K | 6.5K       | ▲  |
| XX           | XX            | XX           | N              | V     | P    | T     | D                 | 3  | 4  | 6          | XX |

### TECHNICAL DRAWINGS



\* For different options, please contact our team.