

ELECTI ROUND SF 55

LED surface type
downlight



- Aluminum injection body
- High efficiency reflector
- Constant current LED driver
- Electrostatic powder coating paint
- Optional body colors
- ENEC Standards



BASIC OPTIONS

- on/off Control (No Dimmable)
- Input Voltage 230V/AC
- Color Rendering Index > 80
- Light Temperature 4000K
- Light Beam 19°, 40°
- White Body Color

| PRODUCT | CODE | W | Height | Lenght | Temp | Lumen* |
|--------------------------|------|----|--------|--------|-------|--------|
| ELECROSF55.10.110.N.4.19 | | 10 | 110 | Ø55 | 4000K | 1070 |
| ELECROSF55.10.110.N.4.40 | | 10 | 110 | Ø55 | 4000K | 1040 |


* According to 4000K light temperature

REFLECTOR OPTIONS



CUSTOMIZE OPTIONS


| | | | | | | | | | | |
|----------------|---------------|----------------|---------------|----------------------|-------------------------|-------------------------|---------------|----------------------------|------------------|---------------|
| Dimmable 1-10V | Dimmable PUSH | Dimmable TRIAC | Dimmable DALI | Input Voltage 24V/DC | Light Temperature 3000K | Light Temperature 6500K | Dynamic White | Color Rendering Index > 90 | Black Body Color | EMERGENCY KIT |
| 1-10V | PUSH | TRIAC | DALI | 24V DC | 3K | 6.5K | DYN | CRI > 90 | B | G |

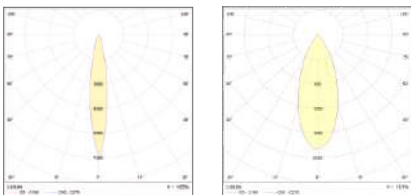

PRODUCT CODING

| Product Name | Product Power | Product Size | Control System | Color Temperature | Light Beam |
|--------------|---------------|--------------|----------------------------------|-------------------|------------|
| XX | XX | XX | on/off, 1-10V, PUSH, TRIAC, DALI | 3K, 4K, 6.5K | XX |
| XX | XX | XX | N, V, P, T, D | 3, 4, 6 | XX |

TECHNICAL DRAWINGS



* For different options, please contact our team.