

ALBA

LED track type spotlight



- Aluminum body
- High efficiency reflector
- Tempered Glass
- Constant current LED driver
- Electrostatic powder coating paint
- Optional body colors
- ENEC Standards




PRODUCT CODE	W	Height	Length	Temp	Lumen*
ALBA.20.147.N.4.16	20	150	Ø147	4000K	2300
ALBA.20.147.N.4.24	20	150	Ø147	4000K	2280
ALBA.20.147.N.4.80	20	150	Ø147	4000K	2260
ALBA.30.147.N.4.16	30	150	Ø147	4000K	3600
ALBA.30.147.N.4.24	30	150	Ø147	4000K	3580
ALBA.30.147.N.4.80	30	150	Ø147	4000K	3560
ALBA.35.147.N.4.16	35	150	Ø147	4000K	4400
ALBA.35.147.N.4.24	35	150	Ø147	4000K	4380
ALBA.35.147.N.4.80	35	150	Ø147	4000K	4360
ALBA.42.147.N.4.16	42	150	Ø147	4000K	5000
ALBA.42.147.N.4.24	42	150	Ø147	4000K	4980
ALBA.42.147.N.4.80	42	150	Ø147	4000K	4960

* According to 4000K light temperature

PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX	XX	XX	on/off 1-10V PUSH TRIAC DALI	3K 4K 6.5K	▲
XX	XX	XX	N V P T D	3 4 6	XX

TECHNICAL DRAWINGS




BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 230V/AC
CRI >80	Color Rendering Index > 80
4K	Light Temperature 4000K
▲	Light Beam 16°, 24°, 80°
w	White Body Color

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Black Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI > 90	B	G

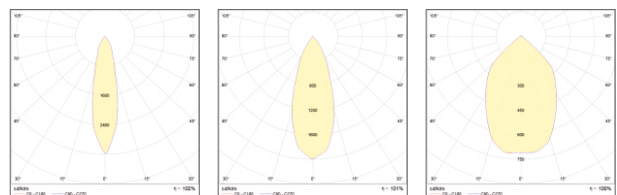

* For different options, please contact our team.