

EVA PLUS

track type

spotlight



- Aluminum extrusion body
- High efficiency reflector
- Tempered Glass
- Constant current LED driver
- Electrostatic powder coating paint
- Optional body colors
- ENEC Standards




PRODUCT CODE	W	Height	Length	Temp	Lumen*
EVAPL.20.90.N.4.28	20	200	Ø90	4000K	2300
EVAPL.20.90.N.4.40	20	200	Ø90	4000K	2280
EVAPL.20.90.N.4.74	20	200	Ø90	4000K	2260
EVAPL.30.90.N.4.28	30	200	Ø90	4000K	3600
EVAPL.30.90.N.4.40	30	200	Ø90	4000K	3580
EVAPL.30.90.N.4.74	30	200	Ø90	4000K	3560
EVAPL.35.90.N.4.28	35	200	Ø90	4000K	4400
EVAPL.35.90.N.4.40	35	200	Ø90	4000K	4380
EVAPL.35.90.N.4.74	35	200	Ø90	4000K	4360

* According to 4000K light temperature

BASIC OPTIONS

- on/off Control (No Dimmable)
- Input Voltage 230V/AC
- Color Rendering Index > 80
- Light Temperature 4000K
- Light Beam 28°, 40°, 74°
- White Body Color



PRODUCT CODING

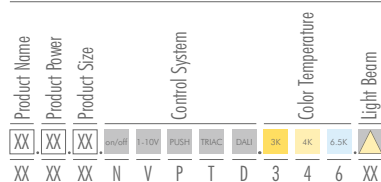

CUSTOMIZE OPTIONS

- Dimmable 1-10V
- Dimmable PUSH
- Dimmable TRIAC
- Dimmable DALI
- Input Voltage 24V/DC
- Light Temperature 3000K
- Light Temperature 6500K
- Dynamic White
- Color Rendering Index > 90
- Black Body Color
- EMERGENCY KIT

TECHNICAL DRAWINGS

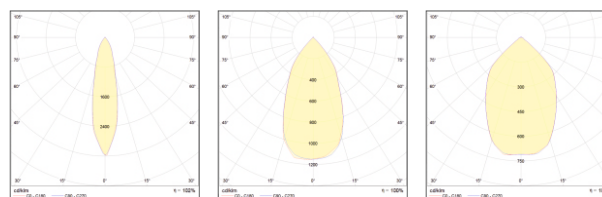

* For different options, please contact our team.