



Aluminum injection body
High efficiency reflector
Constant current LED driver
Electrostatic powder coating paint
Optional body colors
Tempered Glass
ENEC Standards




BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 230V/AC
CRI > 80	Color Rendering Index > 80
4K	Light Temperature 4000K
▲	Light Beam 16°, 24°, 46°, 74°
W	White Body Color

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Black Body Color	Grey Body Color
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI > 90	B	G

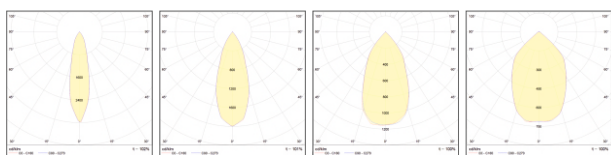

* For different options, please contact our team.

PRODUCT CODE	W	Height	Lenght	Temp	Lumen*
ROCCIO.20.125.N.4.16	20	183	Ø125	4000K	2300
ROCCIO.20.125.N.4.24	20	183	Ø125	4000K	2280
ROCCIO.20.125.N.4.46	20	183	Ø125	4000K	2260
ROCCIO.20.125.N.4.74	20	183	Ø125	4000K	2240
ROCCIO.30.125.N.4.16	30	183	Ø125	4000K	3600
ROCCIO.30.125.N.4.24	30	183	Ø125	4000K	3580
ROCCIO.30.125.N.4.46	30	183	Ø125	4000K	3560
ROCCIO.30.125.N.4.74	30	183	Ø125	4000K	3540
ROCCIO.42.125.N.4.16	42	183	Ø125	4000K	5000
ROCCIO.42.125.N.4.24	42	183	Ø125	4000K	4980
ROCCIO.42.125.N.4.46	42	183	Ø125	4000K	4960
ROCCIO.42.125.N.4.74	42	183	Ø125	4000K	4940
ROCCIO.55.125.N.4.16	55	183	Ø125	4000K	6600
ROCCIO.55.125.N.4.24	55	183	Ø125	4000K	6580
ROCCIO.55.125.N.4.46	55	183	Ø125	4000K	6560
ROCCIO.55.125.N.4.74	55	183	Ø125	4000K	6540

* According to 4000K light temperature

PRODUCT CODING

Product Name	Product Power	Product Size	Control System					Color Temperature			Light Beam
XX XX XX	XX XX XX	XX XX XX	on/off	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K	▲
XX XX XX	XX XX XX	XX XX XX	N	V	P	T	D	3	4	6	XX

TECHNICAL DRAWINGS

