

AQUA

Outdoor Type
Decorative Lighting Poles



Urban lighting between versatility and high visual comfort. AQUA is the pole top luminaire for urban lighting, featuring a catchy shape and excellent performance, also available with the latest lighting technologies.

The wide range of street and radial optics makes it a versatile solution, which does not produce light pollution. Its Classical design interpreted in a modern twist, able to integrate in any urban area. AQUA is the ideal solution for public and residential areas, walkways, squares.

Key Advantages

- Aluminium Body
- Smart energy savings
- Delivery of complete assembly
- Corrosion resistance


Characteristics

Aluminium body
High efficiency LED lighting
Electrostatic powder paint
High quality silicone gasket
Galvanized metal anchorage
LED with Life Span > 100.000 Hours
CCT tolerance within a 3 step MacAdams ellipse
Corrosion Protection
5 Years Warranty
Marine Coating (Optional)
ENEC Certified Drive

Applications



AQUA

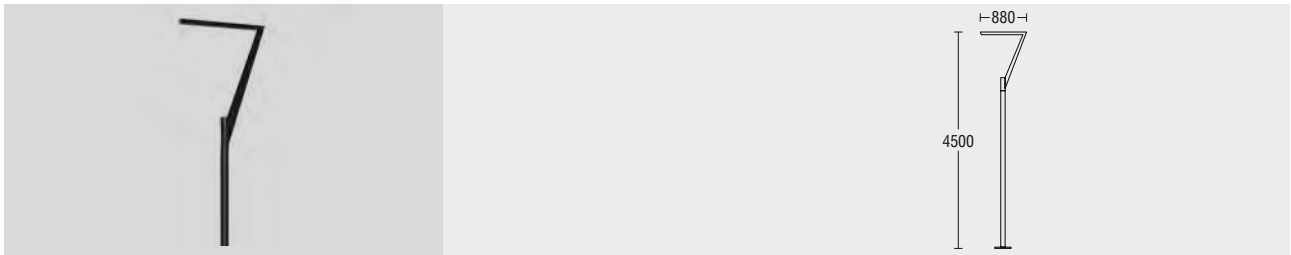

Standard Product


Input	100-305V / AC 50-65Hz
Control	On / Off
Optic	Symmetrical
Light Color	4000K
Body Color	7016 Grey
CRI	>82
Protection	IP66
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,092
Weight	- kg
Ambient Temperature	-30°C / +60°C

Available Options


** Possibility of production in different lengths and sections.*

Input	24V / DC
Control	RGB, DALI, DIM, DMX
Optic	8°, 15°, 30°, 50°, 60°, 70°, 90°, 120°, Asymmetrical
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP67
Warranty	7-10 Years


Light Colors



Body Colors Options



Light Effect



Optional Accessories



IP67
Junction
Box

Ordering Details

Product Code	Power	Light Color	Dimensions	Lumen
AQUA.30.AC.N.4.SYM.7016	35W	4000K	4500	4620
AQUA.45.AC.N.4.SYM.7016	45W	4000K	4500	5940
AQUA.55.AC.N.4.SYM.7016	55W	4000K	4500	7260

** For different options, please contact our team.*



Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX	XX	AC	push	3K	XX	XX
XX	XX	DC	1-10V	4K	XX	XX
XX	XX	N	PUSH	6.5K	XX	XX
XX	XX	V	TRAC	XX	XX	XX
XX	XX	P	DALI	XX	XX	XX
XX	XX	T	XX	XX	XX	XX
XX	XX	D	XX	XX	XX	XX
XX	XX	3	XX	XX	XX	XX
XX	XX	4	XX	XX	XX	XX
XX	XX	6	XX	XX	XX	XX