

# TUNC

Outdoor type  
LED Bollard Lighting



**With the straight lines and robust design of TUNC Bollard, we have made a clear design statement with a reduced, cubic laser cut design approach which gives its soft light an exceedingly stylish frame.**

The light source cannot be seen directly, and so the lighting is pleasantly reflected with the laser design. The symmetrical light distribution creates harmonious iTUNCTION. The light falls from above into the glassless.

## Key Advantages

- Laser light reflection
- Economic and efficient
- Easy installation
- High performance LED
- High corrosion resistance
- Interesting light sculpture

## Characteristics

- 
- Aluminium body
  - High efficiency LED lighting
  - Electrostatic powder paint
  - High quality silicone gasket
  - Galvanized metal anchorage
  - LED with Life Span > 100.000 Hours
  - CCT tolerance within a 3 step MacAdams ellipse
  - Corrosion Protection
  - 5 Years Warranty
  - Marine Coating (Optional)
  - ENEC Certified Driver

## Applications



Landscape




Outdoor



Urban

# TUNC

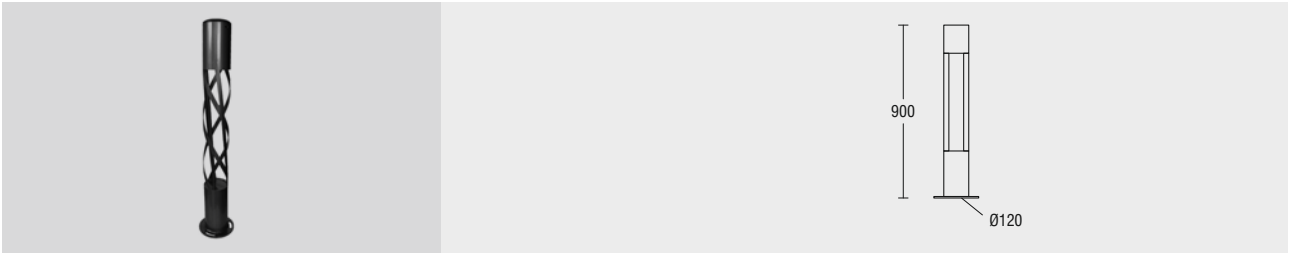


## Standard Product

Input	100-305V / AC 50-65Hz
Control	On / Off
Optic	Symmetrical
Light Color	4000K
Body Color	7016 Grey
CRI	>82
Protection	IP66
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,092
Weight	- kg
Ambient Temperature	-30°C / +60°C


## Available Options

Input	24V / DC
Control	RGB, DALI, DIM, DMX
Optic	8°, 15°, 30°, 50°, 60°, 70°, 90°, 120°, Asymmetrical
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP67-IP68
Impact Resistance	IK10
Warranty	7-10 Years
Diffuser	Transparent or Opaque


## Light Colors



## Body Colors Options

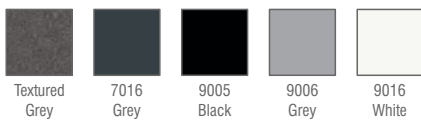

## Light Effect



## Ordering Details

Product Code	Power	Light Color	Dimensions	Lumen
TUNC.8.600.AC.N.4.SYM.7016	8W	4000K	600mm	1056
TUNC.10.600.AC.N.4.SYM.7016	10W	4000K	600mm	1320
TUNC.15.800.AC.N.4.SYM.7016	15W	4000K	800mm	1980
TUNC.20.800.AC.N.4.SYM.7016	20W	4000K	800mm	2640
TUNC.25.1000.AC.N.4.SYM.7016	25W	4000K	1000mm	3300
TUNC.30.1000.AC.N.4.SYM.7016	30W	4000K	1000mm	3960
TUNC.25.1500.AC.N.4.SYM.7016	25W	4000K	1500mm	3300
TUNC.30.1500.AC.N.4.SYM.7016	30W	4000K	1500mm	3960
TUNC.35.2000.AC.N.4.SYM.7016	35W	4000K	2000mm	4620
TUNC.40.2000.AC.N.4.SYM.7016	40W	4000K	2000mm	5280



## Optional Accessories



IP67  
Junction  
Box

## Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX	XX	AC DC	on/off 1-10V PUSH TRAC DALI	3K 4K 6.5K	XX	XX
XX	XX	AC DC	N V P T D	3 4 6	XX	XX