

ATOM family

Ø94-Ø232

recessed type

downlight



Aluminum injection body,
 UV protected diffuser,
 Opal Polystyren/PMMA (Fire-Proof) /
 Microprismatic (3D) Diffuser Types,
 Constant current LED driver,
 Electrostatic powder coating paint,
 Optional body colors,
 ENEC Standards



PRODUCT CODE	W	Height	Length	Hole Size	Temp	Lumen*
ATOM 2".6.94.N.4.110	6	45	Ø94	Ø85	4000K	570
ATOM 3".8.117.N.4.110	8	45	Ø117	Ø105	4000K	760
ATOM 4".10.147.N.4.110	10	45	Ø147	Ø130	4000K	1050
ATOM 5".16.174.N.4.110	16	45	Ø174	Ø158	4000K	1840
ATOM 6".21.196.N.4.110	21	45	Ø196	Ø175	4000K	2415
ATOM 8".23.232.N.4.110	23	45	Ø232	Ø214	4000K	2703
ATOM 8".30.232.N.4.110	30	45	Ø232	Ø214	4000K	3540

* According to 4000K light temperature

BASIC OPTIONS

- on/off Control (No Dimmable)
- 230V AC Input Voltage 230V/AC
- CRI >80 Color Rendering Index > 80
- 4K Light Temperature 4000K
- Light Beam 110°
- White Polystyren Diffuser
- w White Body Color



PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX XX XX	1-10V PUSH	3 4 6	3K 4K 6.5K	XX	

CUSTOMIZE OPTIONS

- Dimmable 1-10V
- Dimmable PUSH
- Dimmable TRIAC
- Dimmable DALI
- Input Voltage 24V/DC
- Light Temperature 3000K
- Light Temperature 6500K
- Dynamic White
- Color Rendering Index > 90
- Transparent Diffuser
- Diffuser Options
- EMERGENCY KIT

TECHNICAL DRAWINGS

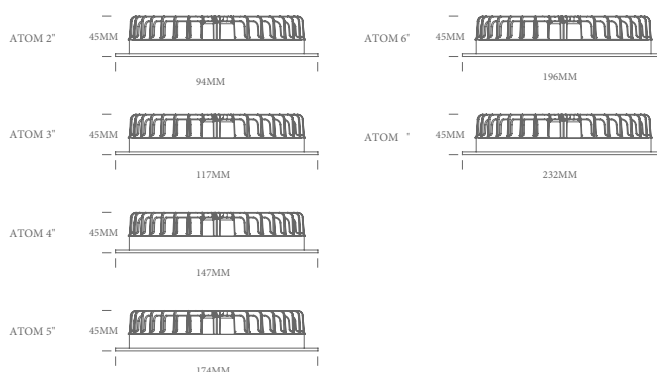

* For different options, please contact our team.