



- Aluminum injection body
- High efficiency reflector
- Tempered Glass
- Constant current LED driver
- Electrostatic powder coating paint
- Optional body colors
- ENEC standards



### BASIC OPTIONS

- on/off Control (No Dimmable)
- Input Voltage 220V-230V/AC - 50-60Hz
- Color Rendering Index >80
- Light Temperature 4000K
- Light Beam 23°, 37°, 51°
- White Body Color

PRODUCT CODE	W	Height	Length	Hole Size	Temp	Lumen*
ASTER.7.100.N.4.23	7	75	Ø100	Ø80	4000K	770
ASTER.7.100.N.4.37	7	75	Ø100	Ø80	4000K	750
ASTER.7.100.N.4.51	7	75	Ø100	Ø80	4000K	730
ASTER.10.100.N.4.23	10	75	Ø100	Ø80	4000K	1070
ASTER.10.100.N.4.37	10	75	Ø100	Ø80	4000K	1050
ASTER.10.100.N.4.51	10	75	Ø100	Ø80	4000K	1030

\* According to 4000K light temperature


### CUSTOMIZE OPTIONS

- Dimmable 1-10V
- Dimmable PUSH
- Dimmable TRIAC
- Dimmable DALI
- Input Voltage 24V/DC
- Light Temperature 3000K
- Light Temperature 6500K
- Dynamic White
- Color Rendering Index >90
- Black / Grey Body Color
- Emergency Kit




### PRODUCT CODING

Product Name	Product Power	Product Size	Control System					Color Temperature			Light Beam
XX	XX	XX	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K	XX	
XX	XX	XX	N	V	P	T	D	3	4	6	XX

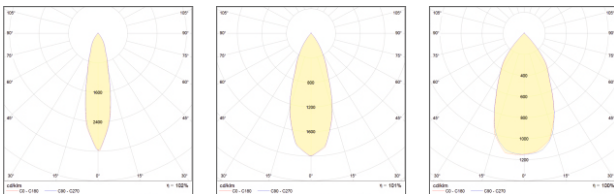

### TECHNICAL DRAWINGS



\* For different options, please contact our team.