



- Aluminum injection body
- High efficiency reflector
- Constant current LED driver
- Electrostatic powder coating paint
- Optional body colors
- ENEC Standards



BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 230V/AC
CRI >80	Color Rendering Index >80
4K	Light Temperature 4000K
	Light Beam 23°, 37°, 51°
w	White Body Color

PRODUCT CODE	W	Height	Lenght	Hole Size	Temp	Lumen*
POLO.7.0159.N.4.23	7	180	Ø159	Ø140	4000K	770
POLO.7.0159.N.4.37	7	180	Ø159	Ø140	4000K	750
POLO.7.0159.N.4.51	7	180	Ø159	Ø140	4000K	730
POLO.10.0159.N.4.23	10	180	Ø159	Ø140	4000K	1070
POLO.10.0159.N.4.37	10	180	Ø159	Ø140	4000K	1050
POLO.10.0159.N.4.51	10	180	Ø159	Ø140	4000K	1030


* According to 4000K light temperature

CUSTOMIZE OPTIONS


Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index >90	Black Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI >90	B	G

PRODUCT CODING

Product Name	Product Power	Product Size	Control System					Color Temperature			Light Beam
XX	XX	XX	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K		
XX	XX	XX	N	V	P	T	D	3	4	6	XX

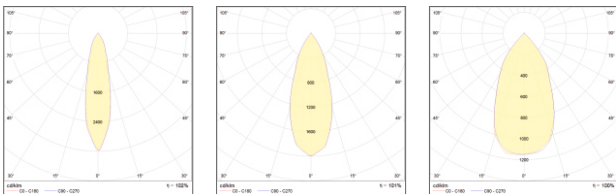

TECHNICAL DRAWINGS



* For different options, please contact our team.