


Orbit TrioAdjustable

recessed type
downlight



- Aluminum injection body and heatsink
- Constant current LED driver
- Electrostatic powder coating paint
- Tempered glass
- Optional body colors
- ENEC Standards



PRODUCT CODE	W	Height	Length	Hole Size	Temp	Lumen*
ORBT3.60.0522.N.4.16	60	110	0522	Ø158x3	4000K	6900
ORBT3.60.0522.N.4.24	60	110	0522	Ø158x3	4000K	6880
ORBT3.60.0522.N.4.46	60	110	0522	Ø158x3	4000K	6860
ORBT3.60.0522.N.4.74	60	110	0522	Ø158x3	4000K	6840
ORBT3.90.0522.N.4.16	90	110	0522	Ø158x3	4000K	10950
ORBT3.90.0522.N.4.24	90	110	0522	Ø158x3	4000K	10930
ORBT3.90.0522.N.4.46	90	110	0522	Ø158x3	4000K	10910
ORBT3.90.0522.N.4.74	90	110	0522	Ø158x3	4000K	10890
ORBT3.126.0522.N.4.16	126	110	0522	Ø158x3	4000K	15300
ORBT3.126.0522.N.4.24	126	110	0522	Ø158x3	4000K	15280
ORBT3.126.0522.N.4.46	126	110	0522	Ø158x3	4000K	15260
ORBT3.126.0522.N.4.74	126	110	0522	Ø158x3	4000K	15240

BASIC OPTIONS


- on/off Control (No Dimmable)
- 230V AC Input Voltage 230V/AC
- CRI > 80 Color Rendering Index > 80
- 4K Light Temperature 4000K
- Light Beam 16°, 24°, 46°, 74°
- w White Body Color

* According to 4000K light temperature

PRODUCT CODING


Product Name	Product Power	Product Size	Control System				Color Temperature			Light Beam	
XX	XX	XX	on/off	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K	XX
XX	XX	XX	N	V	P	T	D	3	4	6	XX

TECHNICAL DRAWINGS

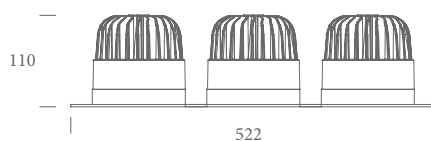

CUSTOMIZE OPTIONS

- Dimmable 1-10V
- Dimmable PUSH
- Dimmable TRIAC
- Dimmable DALI
- Input Voltage 24V/DC
- Light Temperature 3000K
- Light Temperature 6500K
- Dynamic White
- Color Rendering Index > 90
- Black Body Color
- EMERGENCY KIT

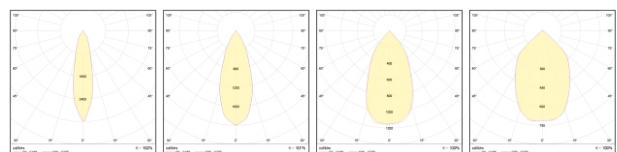

* For different options, please contact our team.