


Trimless recessed type
downlight

Aluminum injection body
High efficiency reflector
Tempered Glass
Constant current LED driver
Electrostatic powder coating
paint Optional body colors
ENEC Standards

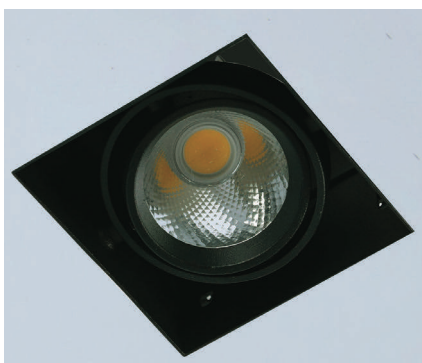

BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 220V-230V/AC - 50-6-Hz
CRI >80	Color Rendering Index >80
4K	Light Temperature 4000K
▲	Light Beam 23°, 37°, 51°
B	White Body Color

PRODUCT CODE	W	Height	Lenght	Hole Size	Temp	Lumen*
LYRAST.7.120x120.N.4.23	7	90	90x90	90x90	4000K	770
LYRAST.7.120x120.N.4.37	7	90	90x90	90x90	4000K	750
LYRAST.7.120x120.N.4.51	7	90	90x90	90x90	4000K	730
LYRAST.10.120x120.N.4.23	10	90	90x90	90x90	4000K	1070
LYRAST.10.120x120.N.4.37	10	90	90x90	90x90	4000K	1050
LYRAST.10.120x120.N.4.51	10	90	90x90	90x90	4000K	1030


* According to 4000K light temperature

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index >90	White/Grey Body Color	Emergency Kit
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI >90	W	E

PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX XX XX	XX XX XX	XX XX XX	XX XX XX XX XX XX XX XX	XX XX XX XX XX XX XX XX	XX XX XX XX XX XX XX XX
XX XX XX	XX XX XX	XX XX XX	XX XX XX XX XX XX XX XX	XX XX XX XX XX XX XX XX	XX XX XX XX XX XX XX XX

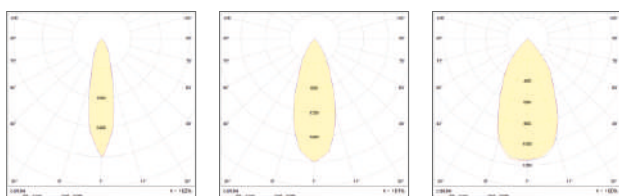

* For different options, please contact our team.

TECHNICAL DRAWINGS

