

ALTO 10

recessed type
downlight



- Aluminum extrusion body
- Aluminum injection end caps
- PMMA optical lens
- Constant current LED driver
- Electrostatic powder coating paint
- Optional body colors
- ENEC Standards



PRODUCT CODE	W	Height	Length	Hole Size	Temp	Lumen*
ALTO10.40.62x405.N.4.36	40	61	62x405	48x397	4000K	3200
ALTO10.40.62x405.N.4.35x7	40	61	62x405	48x397	4000K	3180
ALTO10.50.62x405.N.4.36	50	61	62x405	48x397	4000K	4000
ALTO10.50.62x405.N.4.35x7	50	61	62x405	48x397	4000K	3980
ALTO10.60.62x405.N.4.36	60	61	62x405	48x397	4000K	5000
ALTO10.60.62x405.N.4.35x70	60	61	62x405	48x397	4000K	4980

* According to 4000K light temperature

BASIC OPTIONS

- on/off Control (No Dimmable)
- Input Voltage 230V/AC
- Color Rendering Index > 80
- Light Temperature 4000K
- Light Beam 36°, 35x 70°
- White Body Color

REFLECTOR OPTIONS



Black



PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX XX XX	on/off 1-10V PUSH TRIAC DALI	3K 4K 6.5K			
XX XX XX	N V P T D	3 4 6			XX

CUSTOMIZE OPTIONS

- Dimmable 1-10V
- Dimmable PUSH
- Dimmable TRIAC
- Dimmable DALI
- Input Voltage 24V/DC
- Light Temperature 3000K
- Light Temperature 6500K
- Dynamic White
- Color Rendering Index > 90
- Black Body Color
- EMERGENCY KIT

TECHNICAL DRAWINGS

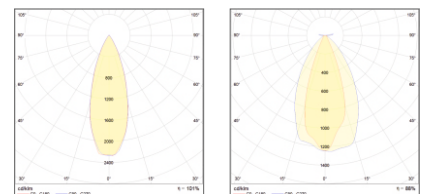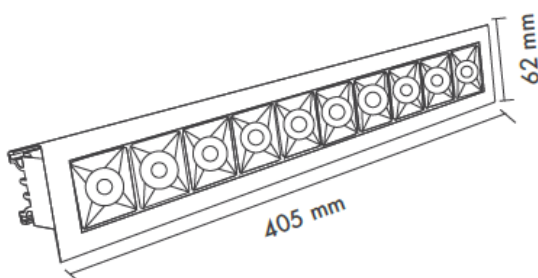

* For different options, please contact our team.