

ALTO 5

LED recessed type downlight



Aluminum extrusion body
Aluminum injection end caps
PMMA optical lens
Constant current LED driver
Electrostatic powder coating paint
Optional body colors
ENEC Standards



PRODUCT CODE	W	Height	Length	Hole Size	Temp	Lumen*
ALTO5.20.62x215.N.4.36	20	61	62x215	48x207	4000K	1600
ALTO5.20.62x215.N.4.35x70	20	61	62x215	48x207	4000K	1580
ALTO5.25.62x215.N.4.36	25	61	62x215	48x207	4000K	2000
ALTO5.25.62x215.N.4.35x70	25	61	62x215	48x207	4000K	1980
ALTO5.30.62x215.N.4.36	30	61	62x215	48x207	4000K	2500
ALTO5.30.62x215.N.4.35x70	30	61	62x215	48x207	4000K	2480
ALTO5.35.62x215.N.4.35x70	35	61	62x215	48x207	4000K	2710
ALTO5.35.62x215.N.4.6	35	61	62x215	48x207	4000K	2730

According to 4000K light temperature.

REFLECTOR OPTIONS



Black

PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX XX XX	XX XX XX	XX XX XX	XX XX XX	XX XX XX	XX XX XX
XX XX XX	XX XX XX	XX XX XX	XX XX XX	XX XX XX	XX XX XX



BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 230V/AC
CRI >80	Color Rendering Index >80
4K	Light Temperature 4000K
36°/70°	Light Beam 36°, 35x 70°
W	White Body Color

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index >90	Black Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI >90	B	G

TECHNICAL DRAWINGS

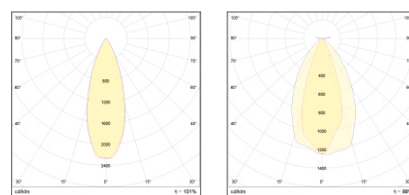

* For different options, please contact our team.