

ALTO TRIO

LED recessed type
downlight



- Aluminum extrusion body
- Aluminum injection end caps
- PMMA optical lens
- Constant current LED driver
- Electrostatic powder coating paint
- Optional body colors
- ENEC Standards



PRODUCT CODE	W	Height	Length	Hole Size	Temp	Lumen*
ALTO3.10.62x138.N.4.36	10	61	62x138	48x127	4000K	950
ALTO3.10.62x138.N.4.35x70	10	61	62x138	48x127	4000K	930
ALTO3.12.62x138.N.4.36	12	61	62x138	48x127	4000K	1100
ALTO3.12.62x138.N.4.35x70	12	61	62x138	48x127	4000K	1080
ALTO3.15.62x138.N.4.36	15	61	62x138	48x127	4000K	1200
ALTO3.15.62x138.N.4.35x70	15	61	62x138	48x127	4000K	1180
ALTO3.17.62x138.N.4.36	17	61	62x138	48x127	4000K	1360
ALTO3.17.62x138.N.4.35x70	17	61	62x138	48x127	4000K	1340
ALTO3.20.62x138.N.4.36	20	61	62x138	48x127	4000K	1600
ALTO3.20.62x138.N.4.35x70	20	61	62x138	48x127	4000K	1580

REFLECTOR



Black

* According to 4000K light temperature

PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX XX XX	on/off 1-10V PUSH TRIAC DALI	3K 4K 6.5K			
XX XX XX	N V P T D	3 4 6			XX



BASIC OPTIONS

- on/off Control (No Dimmable)
- Input Voltage 230V/AC
- Color Rendering Index >80
- Light Temperature 4000K
- Light Beam 36°, 35x 70°
- White Body Color

CUSTOMIZE OPTIONS

- Dimmable 1-10V
- Dimmable PUSH
- Dimmable TRIAC
- Dimmable DALI
- Input Voltage 24V/DC
- Light Temperature 3000K
- Light Temperature 6500K
- Dynamic White
- Color Rendering Index >90
- Black Body Color
- EMERGENCY KIT

TECHNICAL DRAWINGS

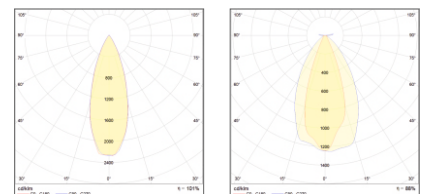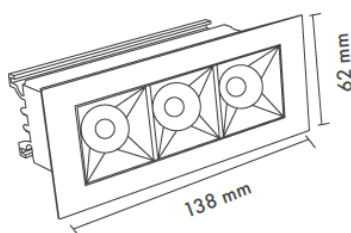

* For different options, please contact our team.