

ALTUM

recessed type
downlight

Aluminum injection body
High efficiency reflector
Tempered glass
Constant current LED driver
Electrostatic powder coating paint
Optional body colors
ENEC Standards



PRODUCT CODE	W	Height	Length	Hole Size	Temp	Lumen
ALTUM.7.147.N.4.47	7	160	Ø147	Ø130	4000K	978
ALTUM.10.147.N.4.47	10	160	Ø147	Ø130	4000K	1400
ALTUM.13.147.N.4.47	13	160	Ø147	Ø130	4000K	1820
ALTUM.20.147.N.4.47	20	160	Ø147	Ø130	4000K	2800
ALTUM.30.147.N.4.47	30	160	Ø147	Ø130	4000K	4200
ALTUM.42.147.N.4.47	42	160	Ø147	Ø130	4000K	5880

* According to 4000K light temperature

BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 220V/AC - 50-60Hz
CRI >80	Color Rendering Index >80
4K	Light Temperature 4000K
47°	Light Beam 47°
W	White Body Color



CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index >90	Black / Grey Body Color	Emergency Kit
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI >90	B	G

PRODUCT CODING

Product Name	Product Power	Product Size	Control System					Color Temperature			Light Beam
XX	XX	XX	1-10V	PUSH	TRIAC	DALI		3K	4K	6.5K	XX
XX	XX	XX	N	V	P	T	D	3	4	6	XX

TECHNICAL DRAWINGS

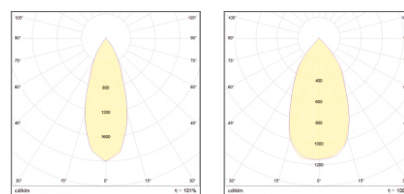

* For different options, please contact our team.