


ANE S

Outdoor Type Decorative Lighting
Poles

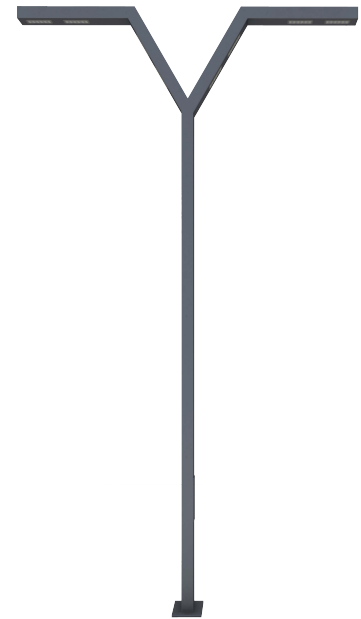

ANE S represent the **maximum expression of love and respect for the tradition of great historical city centers.**

This HB-LUX decorative classic layout is ideal for lighting public parks, squares or pedestrian areas. The urban lighting version is perfect to complement the public lighting of a park or a pedestrian area, ideal for adding elegance to an entrance or to enhance city parks, squares or pedestrian areas. with a classic-style décor is able to enhance the value of historic city centres giving them a timeless style.

Characteristics

Aluminium body
High efficiency LED lighting
Electrostatic powder paint
High quality silicone gasket
Galvanized metal anchorage
Aluminium PCB
LED with Life Span > 100.000 Hours
CCT tolerance within a 3 step MacAdams ellipse
Corrosion Protection
5 Years Warranty
Marine Coating (Optional)
ENEC Certified Driver

Key Advantages

- Aluminium Body
- Smart energy savings
- Delivery of complete assembly
- Corrosion resistance

Applications



Landscape




Outdoor



Urban

ANE S



Standard Product

Input	100-305V / AC 50-65Hz
Control	On / Off
Optic	Symmetrical
Light Color	4000K
Body Color	7016 Grey
CRI	> 82
Protection	IP66
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,092
Weight	- kg
Ambient Temperature	-30°C / +60°C

Available Options


* Possibility of production in different lengths and sections.

Input	24V / DC
Control	RGB, DALI, DIM, DMX
Optic	8°, 15°, 30°, 50°, 60°, 70°, 90°, 120°, Asymmetrical
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	> 90
Protection	IP67
Warranty	7-10 Years


Ordering Details

Product Code	Power	Light Color	H1	S1	Lumen
ANE.S.30.AC.N.4.SYM.7016	30W	4000K	4000	150x80	3665
ANE.S.40.AC.N.4.SYM.7016	40W	4000K	4000	150x80	4800
ANE.S.50.AC.N.4.SYM.7016	50W	4000K	4000	150x80	6012
ANE.S.60.AC.N.4.SYM.7016	60W	4000K	4000	150x80	7200
ANE.S.30.AC.N.4.SYM.7016	30W	4000K	5000	150x100	3665
ANE.S.40.AC.N.4.SYM.7016	40W	4000K	5000	150x100	4800
ANE.S.50.AC.N.4.SYM.7016	50W	4000K	5000	150x100	6012
ANE.S.60.AC.N.4.SYM.7016	60W	4000K	5000	150x100	7200
ANE.S.30.AC.N.4.SYM.7016	30W	4000K	6000	150x80	3665
ANE.S.40.AC.N.4.SYM.7016	40W	4000K	6000	150x80	4800
ANE.S.50.AC.N.4.SYM.7016	50W	4000K	6000	150x80	6012
ANE.S.60.AC.N.4.SYM.7016	60W	4000K	6000	150x80	7200
ANE.S.30.AC.N.4.SYM.7016	30W	4000K	7000	150x100	3665
ANE.S.40.AC.N.4.SYM.7016	40W	4000K	7000	150x100	4800
ANE.S.50.AC.N.4.SYM.7016	50W	4000K	7000	150x100	6012
ANE.S.60.AC.N.4.SYM.7016	60W	4000K	7000	150x100	7200
ANE.S.30.AC.N.4.SYM.7016	30W	4000K	8000	150x80	3665
ANE.S.40.AC.N.4.SYM.7016	40W	4000K	8000	150x80	4800
ANE.S.50.AC.N.4.SYM.7016	50W	4000K	8000	150x80	6012
ANE.S.60.AC.N.4.SYM.7016	60W	4000K	8000	150x80	7200


Light Colors



Body Colors Options



Light Effect



* For different options, please contact our team.

Optional Accessories



IP67
Junction
Box



Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX XX	XX	AC DC	ON/OFF 1-10V PUSH TRIAC DALI	3K 4K 6.5K	XX	XX
XX XX	XX	AC DC	N V P T D	3 4 6	XX XX	XX