

APLIS

recessed type
downlight



- Aluminum injection body
- High efficiency reflector
- Tempered glass
- Constant current LED driver
- Electrostatic powder coating paint
- Optional body colors
- ENEC Standards



PRODUCT CODE	W	Height	Length	Hole Size	Temp	Lumen*
APLIS.7.95.N.4.25	7	85	Ø95	Ø85	4000K	770
APLIS.7.95.N.4.47	7	85	Ø95	Ø85	4000K	750
APLIS.10.95.N.4.25	10	85	Ø95	Ø85	4000K	1070
APLIS.10.95.N.4.47	10	85	Ø95	Ø85	4000K	1050

* According to 4000K light temperature

BASIC OPTIONS

- on/off Control (No Dimmable)
- Input Voltage 220- 230V/AC - 50-60Hz
- Color Rendering Index >80
- Light Temperature 4000K
- Light Beam 25°, 47°
- White Body Color



CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index >90	Black / Grey Body Color	Emergency Kit
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI >90	B	G

PRODUCT CODING

Product Name	Product Power	Product Size	Control System				Color Temperature			Light Beam	
XX	XX	XX	on/off	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K	XX
XX	XX	XX	N	V	P	T	D	3	4	6	XX

TECHNICAL DRAWINGS

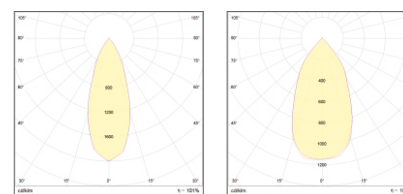

* For different options, please contact our team.