


ARCHI DOT PIXEL

Dot Lighting
Surface Mounted Facade Lighting



Archi dot luminarie is mainly used dot facade lighting. Continuous interconnection with cables.

Aluminium body offering various installation types. It is available as dimming options and many customizations options.

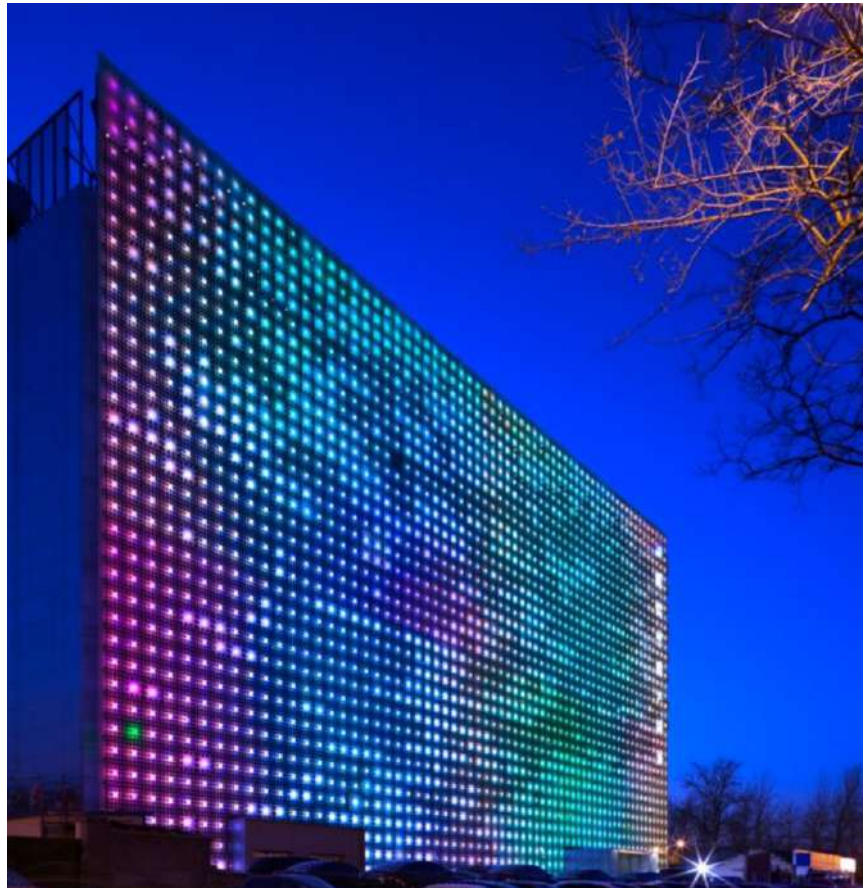

ARCHI DOT PIXEL

Dot Lighting
Surface Mounted Facade Lighting

Basic Options

Light Source	Power LED
Light Source Color	White
Control Interface	External DMX512
Protection Class IEC	Class 1
CE Mark	Yes
ENEC Standards	Yes
Warranty Period	5 years
L 70	> 60 000 Hours
MacAdams	3 Step MacAdams
Working Temperature	-25°C ~ +50°C
Luminous Flux	70lm/px*
Viewing Angle	140°
Connections	Flat Cable

Optics

Light Distribution	Opal
--------------------	------

Connection

Connection Cable	4 pins circular
------------------	-----------------

Customized Options

Power	2W - 10W ± %5
Input Voltage	12V/DC (Optional)
Light Color	Monocolor / RGB / CCT
Control Interface	SPI

Body Options

Body	Polycarbonate
Glass	PMMA
Gasket	Silicone
Protection Rating	IP67
Impact Resistance	IK07
Color	Grey
Dimensions (ØxH)	Ø44mm x 28mm
Screws	316 Stainless Steel
UV-resistant PC body	
Cable and fixture color options	
Color Depth	16,7 Million
Pixel Pitch	75mm-500mm*

Electrical Options

Operating Voltage	24V/DC
Power	1,4W/pc
Light Color	White
Power Unit	Power Supply (External)

Product Coding

Product Name	Product Power	Product Size	Control System	Color	Light Beam
XX	XX	XX	DMX	RGB	XX
XX	XX	XX	D	RGBW	XX

* Cable distance between products may vary.

Dot Lighting Surface Mounted Facade Lighting

Mounting Accessories



Standard Mounting Bracket



M4 Allen Key

Connection Accessories






Extension cable



Input cable

Sizes

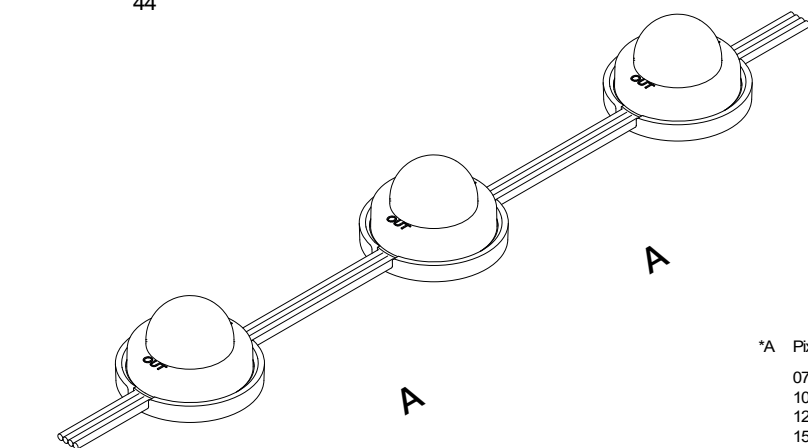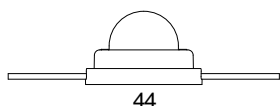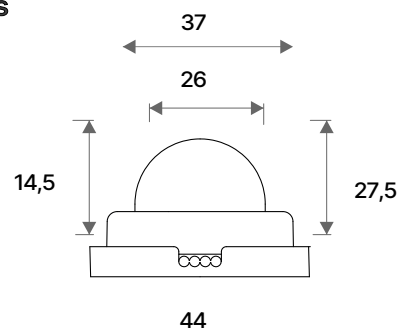

*A Pixel Pitch

075
100
125
150
175
:
475
500

Connection Diagram

