


# ARIAN

LED surface type  
Ceiling/Wall mounted lighting fixture

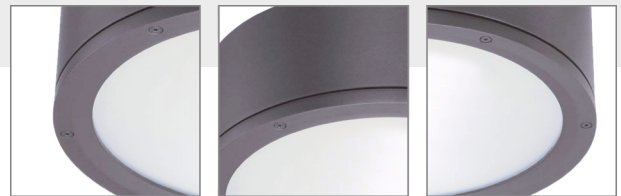

**Simple shapes are often best suited to the environment, and squares and circles have always been examples of harmony and perfection. In ARIAN, these characteristics are emphasized by applying a simple frame to the wall, which determines the luminous flux and accentuates objects even when closed.**

Aluminium Body with no visible screws and hidden installation tools. It is corrosion-free aluminium forms a uniform and integrated whole, and features a high-quality finish in metallic colours.

## Characteristics

- Aluminium Injection Body
- Electrostatic Powder Paint
- Optional RAL Colors
- PMMA Diffuser
- Aluminium PCB
- LED with Life Span > 100.000 Hours
- CCT tolerance within a 3 step MacAdams ellipse
- Corrosion Protection (Optional)
- 5 Years Warranty
- Marine Coating (Optional)

## Key Advantages

- Glare-free
- Economic and efficient
- Easy installation
- High performance LED
- High corrosion resistance
- Symmetric Beam
- UV Resistan Diffuser
- Modern Design

## Applications



# ARIAN




## Standard Product

Input	220-240V / AC 50-60Hz
Control	On / Off
Optic	120°
Light Color	4000K
Body Color	9006 Grey
CRI	>82
Protection	IP65
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,090
Weight	2,4 kg
Ambient Temperature	-30°C / +60°C

## Available Options

Input	24V / DC
Control	DALI, DIM, DMX
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP66 - IP67
Warranty	7-10 Years
Glass	Extra Clear

## Light Colors




## Ordering Details


Product Code	Power	Light Color	Lumen
ARIAN.20.AC.N.4.120.9006	20W	4000K	2100
ARIAN.30.AC.N.4.120.9006	30W	4000K	3150

\* For different options, please contact our team.

## Body Colors Options

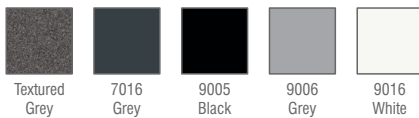

## Beam Angle Options



## Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX	XX	AC DC	on/off 1-10V PUSH TRAC DALI	3K 4K 6.5K	XX	XX
XX	XX	AC DC	N V P T D	3 4 6	XX	XX