

ASPECT family

recessed type downlight

Aluminum injection body,
UV protected diffuser,
Opal Polystyren/PMMA (Fire-Proof) /
Microprismatic(3D) Diffuser Types,
Constant current LED driver,
Electrostatic powder coating paint,
Optional body colors,
ENEC Standards



PRODUCT CODE	W	Height	Lenght	Hole Size	Temp	Lumen*
ASPECT 2".6.85.N.4.105	6	43	Ø94	Ø85	4000K	580
ASPECT 3".8.85.N.4.105	8	47	Ø118	Ø130	4000K	770
ASPECT 4".10.85.N.4.105	10	35	Ø164	Ø140	4000K	1060

* According to 4000K light temperature

BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 230V/AC
CRI >80	Color Rendering Index >80
3K	Light Temperature 3000K
▲	Light Beam 105
●	White Polystyren Diffuser
w	White Body Color



PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX XX XX	on/off	1-10V	PUSH	TRAC	DALI
XX XX XX	N	V	P	T	D
XX XX XX				3	4
				6	XX

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 4000K	Light Temperature 6500K	Dynamic White	Color Rendering Index >90	Transparent Diffuser	<α ^ ^ mkj □ Ghlagfk	□ = E=J? = F; Q □ CAL
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN >90	CRI >90	□	D	E

TECHNICAL DRAWINGS

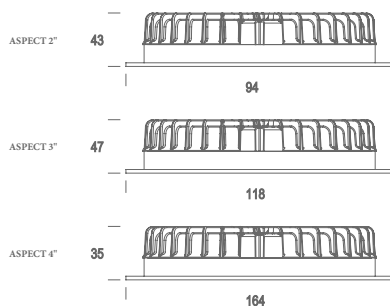

* For different options, please contact our team.