

ASPECT family

Ø131

recessed type
downlight



Aluminum injection body,
UV protected diffuser,
Opal Polystyren/PMMA (Fire-Proof) /
Microprismatic(3D) Diffuser Types,
Constant current LED driver,
Electrostatic powder coating paint,
Optional body colors,
ENEC Standards



PRODUCT CODE	W	Height	Length	Hole Size	Temp	Lumen*
ASPECT 4".8.131.N.3.105	8	80	Ø84	Ø70	4000K	760
ASPECT 6".13.131.N.3.105	13	80	Ø84	Ø70	4000K	1235
ASPECT 8".20.131.N.3.105	20	80	Ø84	Ø70	4000K	1900
ASPECT 10".30.131.N.3.105	30	80	Ø84	Ø70	4000K	2850

* According to 4000K light temperature

BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 230V/AC
CRI >80	Color Rendering Index >80
3K	Light Temperature 3000K
▲	Light Beam 105
●	White Polystyren Diffuser
w	White Body Color



PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX XX XX	XX	XX	on/off 1-10V PUSH TRIAC DALI	3K 4K 6.5K	▲
XX XX XX	N	V	P T D	3 4 6	XX

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 4000K	Light Temperature 6500K	Dynamic White	Color Rendering Index >90	Transparent Diffuser	<a ^ ^ mkj □ Ghlagfk	□ = E=J? = F; Q; CAL
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN >90	CRI >90	□	D	E

TECHNICAL DRAWINGS

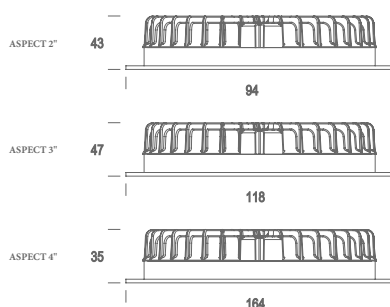

* For different options, please contact our team.