

AURA MAG

magnetic type

linear lighting fixture



- Aluminum extruded body
- UV protected diffuser
- Nickel plated brass parts
- Electrostatic powder coating paint
- Production in different lengths
- Optional body colors
- ENEC standards



BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 220-240V/AC, 50-60HZ
CRI > 80	Color Rendering Index > 80
4K	Light Temperature 4000K
	Light Beam 120° Opaque
	Operating Temperature : -20 / 40 °C
B	Grey Body Color

PRODUCT CODE	W	Lenght	Temp	Lumen*
AURA MAG.5.135.N.4.120	5	135	4000K	550
AURA MAG.10.135.N.4.120	10	135	4000K	1100
AURA MAG.10.270.N.4.120	10	270	4000K	1100
AURA MAG.20.270.N.4.120	20	270	4000K	2200
AURA MAG.15.400.N.4.120	15	400	4000K	1650
AURA MAG.30.400.N.4.120	30	400	4000K	3300

* According to 4000K light temperature




CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 2700K	Light Temperature 3000K	Light Temperature 4000K	Light Temperature 5000K	Dynamic White	Color Rendering Index > 90	Optional Body Color
1-10V	PUSH	TRIAC	DALI	24V DC	2.7K	3K	4K	5K	DYN	CRI > 90	W

PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX XX	XX	XX	on/off 1-10V PUSH TRIAC DALI	2 3 4 5	XX

TECHNICAL DRAWINGS

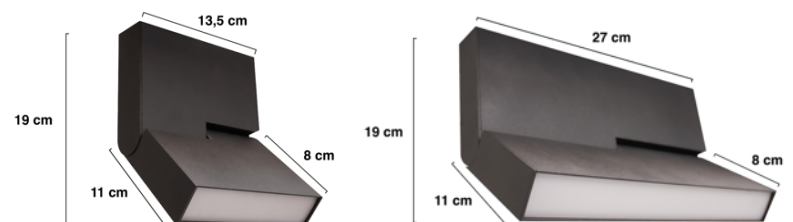

* For different options, please contact our team.