



AXIS M SLIM

In Ground - Drive Over



AXIS m slim is our smallest 1 LED inground which fulfill two important requirements: Small dimensions and powerful light effect.

With a small diameter of 50mm, dimension, Axis recessed inground allows to create powerful and pure light effect. It can be used as a single point of light, thanks to its dimensions. Suitable for installation on floor for outdoor areas, in the drive-over use. Installation in concrete with a recessed box.

Luminaire comes with 2 sides cable as standard.

Key Advantages

- Drive over
- High thermal performance
- High corrosion resistance
- High IP protection
- Excellent light output
- High Ambient temperature
- Easy installation

Characteristics

Aluminium Injection Die Cast Body

Electrostatic Powder Paint

Optional RAL Colors

Extra Clear 5mm Tempered Glass

Aluminium PCB

LED with Life Span > 100.000 Hours

CCT tolerance within a 3 step MacAdams ellipse

Corrosion Protection

5 Years Warranty

Marine Coating (Optional)

ENEC Certified Driver

Applications



Landscape



Outdoor





Urban



Architectural

AXIS M

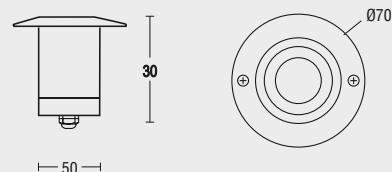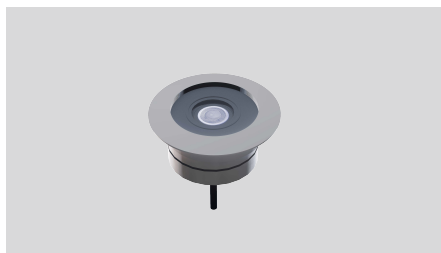


Standard Product

Input	DRIVER IS NOT BUILT IN, REMOTE DRIVER 220V DC
Control	On / Off
Optic	30°
Light Color	4000K
Body Color	7016 Grey
Frame	Stainless Steel
CRI	> 82
Protection	IP67
Impact Resistance	IK10
Protection class IEC	Class I
Power factor (min.)	0,092
Weight	- kg
Ambient Temperature	-30°C / +60°C

Available Options

Input	24V / DC
Control	RGB, DALI, DIM, DMX
Optic	8°, 15°, 30°, 50°, 60°, 70°, 90°, 120°, Asymmetrical
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
Glass	Frosted Diffuser Glass
CRI	> 90
Protection	IP68
Warranty	7-10 Years

Light Colors




Ordering Details

Product Code	Power	Light Color	Beam Angle	Lumen
AXIS.M.SLIM.1.AC.N.4.30.7016	1W	4000K	30°	130
AXIS.M.SLIM.2.AC.N.4.30.7016	2W	4000K	30°	260
AXIS.M.SLIM.3.AC.N.4.30.7016	3W	4000K	30°	390
AXIS.M.SLIM.4.AC.N.4.30.7016	4W	4000K	30°	520

* For different options, please contact our team.


Body Colors Options

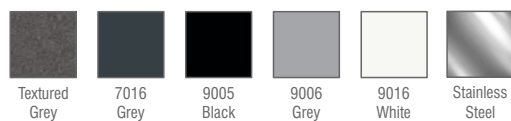

Recessed Box



Beam Angle Options

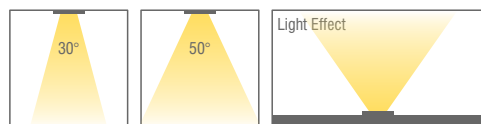

Optional Accessories



Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX XX	XX	AC DC	ON/OFF 1-10V PUSH TRAC DALI	2K 4K 6.5K	XX	XX
XX XX	AC DC	N V	P T D	3 4 6	XX	XX