

BLADE

recessed type
downlight



DKP Metal Body and Aluminum
injection Heatsink
Tempered Glass or Frosted Glass
Constant current LED driver
Electrostatic powder coating paint
Optional body colors
ENEC Standards
Made in TURKEY



PRODUCT CODE	W	Height	Lenght	Hole Size	Temp	Lumen*
BLADE.7.90.N.4.23	7	94	Ø77	Ø68	4000K	870
BLADE.7.90.N.4.37	7	94	Ø77	Ø68	4000K	850
BLADE.7.90.N.4.51	7	94	Ø77	Ø68	4000K	830
BLADE.10.90.N.4.23	10	94	Ø77	Ø68	4000K	1170
BLADE.10.90.N.4.37	10	94	Ø77	Ø68	4000K	1150
BLADE.10.90.N.4.51	10	94	Ø77	Ø68	4000K	1130
BLADE.13.90.N.4.23	13	94	Ø77	Ø68	4000K	1360
BLADE.13.90.N.4.37	13	94	Ø77	Ø68	4000K	1340
BLADE.13.90.N.4.51	13	94	Ø77	Ø68	4000K	1320

According to 4000K light temperature

BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 230V/AC
CRI >80	Color Rendering Index >80
4K	Light Temperature 4000K
▲	Light Beam 23°, 37°, 51°
w	White Body Color



CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index >90	Black Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI >90	B	G

PRODUCT CODING

Product Name	Product Power	Product Size	Control System					Color Temperature			Light Beam
XX	XX	XX	on/off	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K	▲
XX	XX	XX	N	V	P	T	D	3	4	6	XX

TECHNICAL DRAWINGS

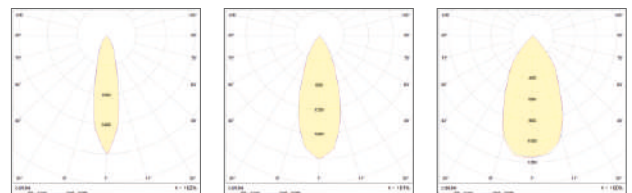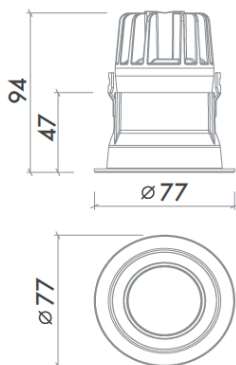

* For different options, please contact our team.