



- Aluminium body
- Aluminium extrusion heatsink
- Nickel plated brass parts
- Electrostatic powder coating paint
- High performance COB LED
- High efficiency reflector
- Optional body colors
- ENEC standards



BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 24V - 48V DC
CRI >80	Color Rendering Index >80
4K	Light Temperature 4000K
Light Beam 15°, 30°, 45°	
Operating Temperature : -20 / +40 °C	
B	Black Body Color

PRODUCT CODE

PRODUCT CODE	W	Dia	Temp	Lumen*
CASUMAG50.10.140.N.4.30	10	Ø50	4000K	1100
CASUMAG50.15.140.N.4.30	15	Ø50	4000K	1650

* According to 4000K light temperature



CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 2700K	Light Temperature 3000K	Light Temperature 4000K	Light Temperature 5000K	Dynamic White	Color Rendering Index > 90	Optional Body Color
1-10V	PUSH	TRIAC	DALI	24V DC	2.7K	3K	4K	5K	DYN	CRI >90	W

PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX XX XX	XX XX XX	XX XX XX	XX XX XX	XX XX XX	XX XX XX
XX XX XX	XX XX XX	XX XX XX	XX XX XX	XX XX XX	XX XX XX

TECHNICAL DRAWINGS

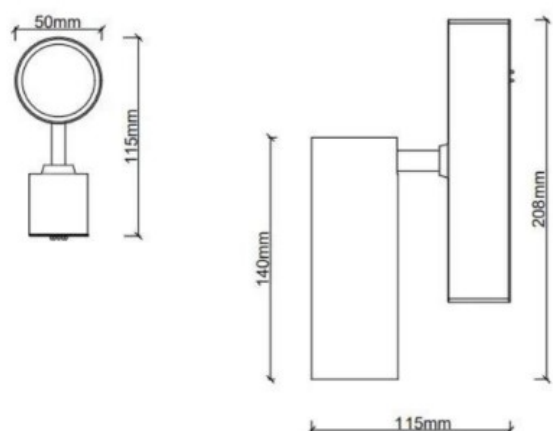

* For different options, please contact our team.