

CESAR DC

Linear Type
Wallwasher



The standard design makes it easy to combine the three different sizes. Linear Suurfaced wallwasher. The powder coated surface completes the attractive, clear appearance.

To guarantee durability, high-quality materials such as corrosion resistant aluminium, toughened glass and stainless steel are used. An innovative ventilation system prevents condensation. The robust, dust proof housing, which is also protected against sprayed water, allows this lighting tool to be used for many years without any damage or maintenance.



Key Advantages

- High corrosion resistance
- High IP protection
- Excellent light output
- High Ambient temperature
- Easy installation


Characteristics

Aluminium Injection Die Cast Body
Electrostatic Powder Paint
Optional RAL Colors
Extra Clear 5mm Tempered Glass
Aluminium PCB
LED with Life Span > 100.000 Hours
CCT tolerance within a 3 step MacAdams ellipse
Corrosion Protection
5 Years Warranty
Marine Coating (Optional)
ENEC Certified Driver

Applications



CESAR WALL WASHER DC

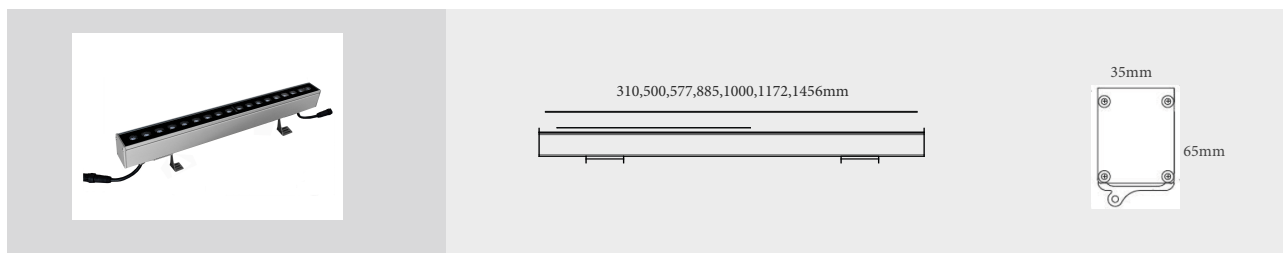


Standard Product

Input	24V DC 50-60Hz
Control	On / Off
Optic	30°
Light Color	4000K
Body Color	7016 Grey
Brackets	Stainless Steel
CRI	> 82
Protection	IP67
Impact Resistance	IK10
Protection class IEC	Class I
Power factor (min.)	0,092
Weight	- kg
Ambient Temperature	-30°C / +60°C

Available Options

Input	24V / DC
Control	RGB, DALI, DIM, DMX
Optic	8°, 15°, 30°, 50°, 60°, 70°, 90°, 120°, Asymmetrical
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
Glass	Frosted Diffuser Glass
CRI	> 90
Protection	IP68
Warranty	7-10 Years


Light Colors



Ordering Details

Product Code	Power	Length	Light Color	Lumen
CESARDC.9.310.N.4.30	9	310mm	4000K	1350
CESARDC.14.310.N.4.30	14	310mm	4000K	2100
CESARDC.18.500.N.4.30	18	500mm	4000K	2700
CESARDC.36.577.N.4.30	36	577mm	4000K	5400
CESARDC.27.885.N.4.30	27	885mm	4000K	4050
CESARDC.54.1000.N.4.30	54	1000mm	4000K	8100
CESARDC.36.1172.N.4.30	36	1172mm	4000K	5400
CESARDC.72.1456.N.4.30	72	1456mm	4000K	10800


Body Colors Options

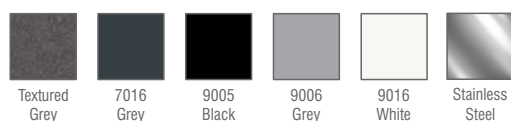

* Products are shown at 30 degrees.

* For different options, please contact our team.

Beam Angle Options

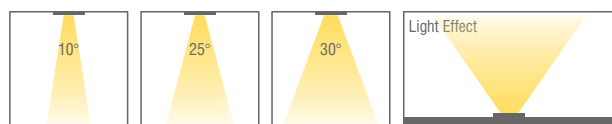

Optional Accessories



Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX XX	XX	AC DC	OFF/ON 1-10V PUSH TRAC DALI	2K 4K 6.5K	XX	XX
XX XX	AC DC	N V	P T D	3 4 6	XX XX	