

CESAR WHITE Dynamic White

Tunable Linear Type Wallwasher



The standard design makes it easy to combine the three different sizes. Linear Suurfaced wallwasher. The powder coated surface completes the attractive, clear appearance.

To guarantee durability, high-quality materials such as corrosion resistant aluminium, toughened glass and stainless steel are used. An innovative ventilation system prevents condensation. The robust, dust proof housing, which is also protected against sprayed water, allows this lighting tool to be used for many years without any damage or maintenance.



Key Advantages

- High corrosion resistance
- High IP protection
- Excellent light output
- High Ambient temperature
- Easy installation

Characteristics

Aluminium Injection Die Cast Body

Electrostatic Powder Paint

Optional RAL Colors

Extra Clear 5mm Tempered Glass

Aluminium PCB

LED with Life Span > 100.000 Hours

CCT tolerance within a 3 step MacAdams ellipse

Corrosion Protection

5 Years Warranty

Marine Coating (Optional)

ENEC Certified Driver

Applications



Landscape



Outdoor




Urban



Architectural

CESAR TUNABLE WHITE

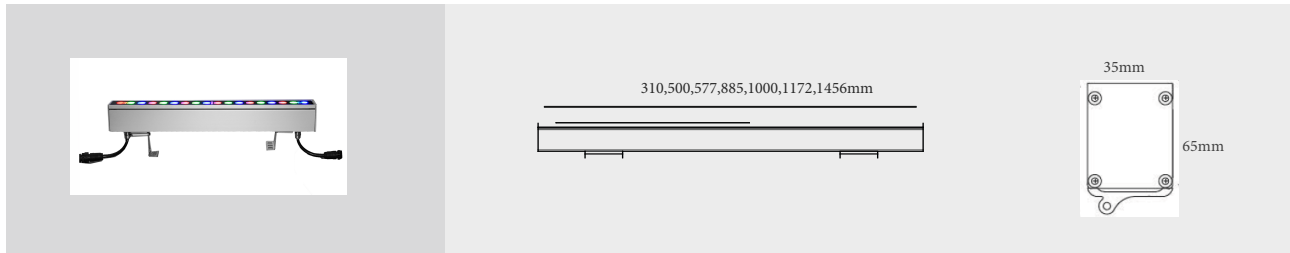


Standard Product

Input	110-240V/AC 50-60Hz
Control	On / Off
Optic	30°
Light Color	Tunable White /2700K-6500K
Body Color	7016 Grey
Brackets	Stainless Steel
CRI	> 82
Protection	IP67
Impact Resistance	IK10
Protection class IEC	Class I
Power factor (min.)	0,092
Weight	- kg
Ambient Temperature	-30°C / +60°C


Available Options

Input	24V / DC
Control	RGB, DALI, DIM, DMX
Optic	8°, 15°, 30°, 50°, 60°, 70°, 90°, 120°, Asymmetrical
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
Glass	Frosted Diffuser Glass
CRI	> 90
Protection	IP68
Warranty	7-10 Years


Light Colors



Body Colors Options



Beam Angle Options

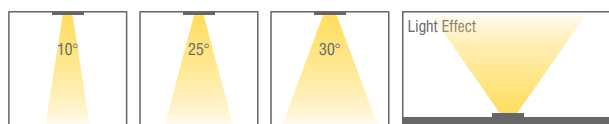

Optional Accessories



Ordering Details

Product Code	Power	Length	Light Color	Lumen
CESART.9.310.N.TW.30	9	310mm	2700K-6500K	1350
CESART.14.310.N.TW.30	14	310mm	2700K-6500K	2100
CESART.18.500.N.TW.30	18	500mm	2700K-6500K	2700
CESART.36.577.N.TW.30	36	577mm	2700K-6500K	5400
CESART.27.885.N.TW.30	27	885mm	2700K-6500K	4050
CESART.54.1000.N.TW.30	54	1000mm	2700K-6500K	8100
CESART.36.1172.N.TW.30	36	1172mm	2700K-6500K	5400
CESART.72.1456.N.TW.30	72	1456mm	2700K-6500K	10800

* Products are shown at 30 degrees.

* For different options, please contact our team.

*TW Options : 2200K-4000K

*TW Options : 2700K-4000K

*TW Options : 4000K-6500K

*CUSTOM TW : XX-YY

Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX XX	XX	AC DC	0-10V PUSH TRAC DALI	2K 4K 6.5K	XX	XX
XX XX	XX	AC DC	N V P T D	3 4 6	XX	XX