





CRYPTO

Outdoor Type Decorative Lighting Poles

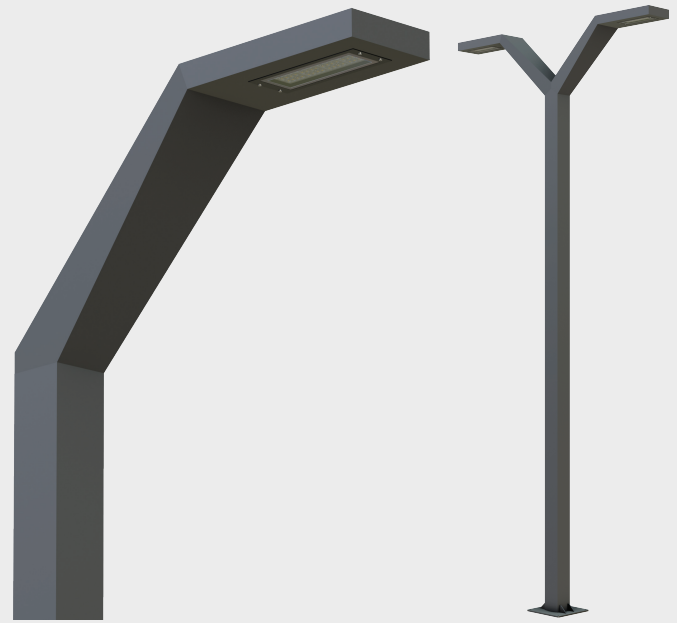

The elegant sobriety of CYRPTO, combined with state-of-the-art lighting technology, ensures its over-average versatility. It can easily be integrated in just about any architectural environment and ful ls every requirement - lighting paths in compliance with safety standards, used in a row, as design-oriented decorative lighting or as a standard guidance system.

Various light distributions, lumen packages, sizes and snoitarugfinocmake these highly adaptable. Depending on personal taste and the area of installation, CRYPTO can be used as pole-top luminaire. When the optional luminaire is added to the latter, it produces a symbolic, almost archetypal effect without losing its characteristically modern simplicity.

Key Advantages

- Can be easily integrated to many designs
- Economic and efficient
- Easy installation
- High performance LED
- High corrosion resistance

Characteristics

Aluminium body

High efficiency LED lighting

Electrostatic powder paint

High quality silicone gasket

Galvanized metal anchorage

ENEC certified driver

3 Step MacAdams

IP66, IK08

Applications



Landscape




Outdoor



Urban

CRYPTO

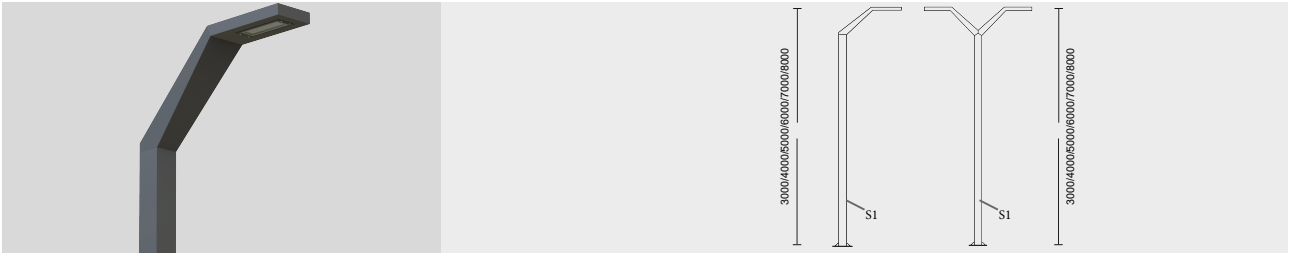

* Possibility of production in different lengths and sections.

Standard Product

Input	210-260V / AC 50-65Hz
Control	On/Off
Optic	Symmetrical
Light Color	4000K
Body Color	7016 Grey
CRI	>80
Protection	IP66
Impact Resistance	IK08
Working Temperature	-30°C / +60°C


Available Options

Input	24V / DC
Control	SMART Dimming
Optic	Asymmetrical
Light Color	3000K, 4000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90

Light Colors




Light Effect



* For different options, please contact our team.

Body Colors Options

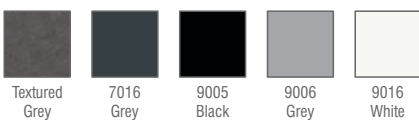

Ordering Details

Product Code	Power	Light Color	H1	S1	Lumen
CRYPTO.30.AC.3000.N.4.SYM.7016	30W	4000K	3000 x	120x80	3660
CRYPTO.40.AC.3000.N.4.SYM.7016	40W	4000K	3000 x	120x80	4880
CRYPTO.60.AC.3000.N.4.SYM.7016	60W	4000K	3000 x	120x80	7320
CRYPTO.30.AC.4000.N.4.SYM.7016	30W	4000K	4000 x	120x80	3660
CRYPTO.40.AC.4000.N.4.SYM.7016	40W	4000K	4000 x	120x80	4880
CRYPTO.60.AC.4000.N.4.SYM.7016	60W	4000K	4000 x	120x80	7320
CRYPTO.30.AC.5000.N.4.SYM.7016	30W	4000K	5000 x	150x80	3660
CRYPTO.40.AC.5000.N.4.SYM.7016	40W	4000K	5000 x	150x80	4880
CRYPTO.60.AC.5000.N.4.SYM.7016	60W	4000K	5000 x	150x80	7320
CRYPTO.30.AC.6000.N.4.SYM.7016	30W	4000K	6000 x	150x80	3660
CRYPTO.40.AC.6000.N.4.SYM.7016	40W	4000K	6000 x	150x80	4880
CRYPTO.60.AC.6000.N.4.SYM.7016	60W	4000K	6000 x	150x80	7320
CRYPTO.30.AC.7000.N.4.SYM.7016	30W	4000K	7000 x	150x80	3660
CRYPTO.40.AC.7000.N.4.SYM.7016	40W	4000K	7000 x	150x80	4880
CRYPTO.60.AC.7000.N.4.SYM.7016	60W	4000K	7000 x	150x80	7320
CRYPTO.30.AC.8000.N.4.SYM.7016	30W	4000K	8000 x	120x80	3660
CRYPTO.40.AC.8000.N.4.SYM.7016	40W	4000K	8000 x	120x80	4880
CRYPTO.60.AC.8000.N.4.SYM.7016	60W	4000K	8000 x	120x80	7320



Optional Accessories



IP67
Junction
Box

Product Coding

Product Name	Product Power	Module Pcs	Current	Product Height	Control System	Color Temperature	Light Beam	Body Color
XX	XX	XX	XX	XX	on/off SMART	3K 4K 5K 6.5K	XX	XX
XX	XX	XX	XX	XX	N S	3 4 5 6	XX	XX